Sunco

2X4 LED HIGH LUMEN SELECTABLE CEILING PANEL

Replace inefficient fluorescent tubes with an abundance of radiant light and low-wattage backlit LED panel. Dustproof and 0-10V dimmable, this fixture also includes flexible mounting brackets for recessed installation. Use it in standard 2x4 drop ceilings for optimal brightness in offices, warehouses, hallways, and more.




MODELS

PN24_HO-4060K

LIGHT DISTRIBUTION ANGLE

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

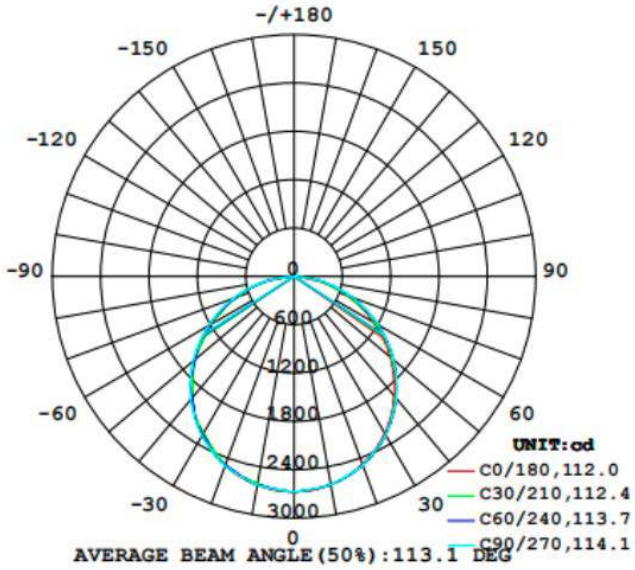

NOTE: The curves indicate the illuminated area and the average illumination at different distances.

CERTIFICATIONS

SPECIFICATIONS

Voltage	**AC120 - 277V**
Wattage	**40W/50W/60W**
Power Factor	**>0.90**

LIGHTING PERFORMANCE

Lumens	**5000/6500/7700**
Amps	**0.66 A**
Frequency	**50/60 Hz**
Color Rendering Index	**80+**
Beam Angle	**120°**
Dimmable	**0-10V**
Efficacy	**134 lm/w**
Color Temperature	**4000K/5000K/6000K**

ENVIRONMENT

Operating Temperature	**32° F - 113° F**

CONSTRUCTION

Housing Material	**SPCC**
Weight	**7.28 lbs**

LIFETIME

Average Lifetime	**50,000 Hours**
Warranty	**7 Years**

Sunco

2x4 LED HIGH LUMEN SELECTABLE CEILING PANEL

Replace inefficient fluorescent tubes with an abundance of radiant light and low-wattage backlit LED panel. Dustproof and 0-10V dimmable, this fixture also includes flexible mounting brackets for recessed installation. Use it in standard 2x4 drop ceilings for optimal brightness in offices, warehouses, hallways, and more.

BRAND	MODEL
LUTRON	DVTV-WH
LUTRON	MS-Z101-WH
LUTRON	NFTV-WH
LUTRON	NTSTV-DV-WH
LEVITON	AWSMT-7DW
LEVITON	DD710-BDZ
LUTRON	DS710-10Z
LEVITON	DSE06-10Z
LEVITON	IP710-LFZ
LEGRAND	RH4FBL3PW
LEGRAND	WS4FBL3PW
MAXXIMA	MEW-DM650
PHILIP	SR1200ZTUNV
COOPER	SF10P-W

We highly recommend using a ELV (electronic low voltage) dimmer compatible with LED lights. Buzzing or flickering is typically an indication that the dimmer and lights used are not compatible. Please consult dimmer manufacturer for maximum wattage capacity.

*May experience “pop-on” behavior, in which lights cannot be turned on immediately to their minimum level. To resolve this issue, first raise the slider switch above the minimum level to turn the lights on, then dim to a lower light level as needed.