
PETURE

PetureCare@gmail.com

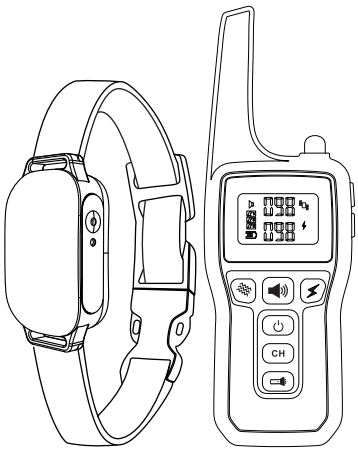

PD 529A-TIO

DOG TRAINING COLLAR

User Guide

REF.NO.P20P24M05D24

CONTENTS

STATEMENT 01
SAFETY INSTRUCTION 01
REINFORCE LEARNING BEHAVIOURS 01
Tips 02
INSTRUCTION OF AUTOMATIC FUNCTION 02
BEFORE USING THE DOG TRAINING COLLAR 03
WHEN USING THE DOG TRAINING COLLAR 04
PACKAGE CONTENTS 04
MAINTENANCE 05
SPECIFICATIONS 05
INTRODUCTION FOR THE BUTTONS 05
OPERATION AND CHARGING 07
How to choose the USB charger 07
Charge the remote transmitter 07
Charge the receiver 07
Turn the receiver on and off 07
Check the receiver power 07
HOW TO WEAR RECEIVER COLLAR CORRECTLY 08
PAIRING AND TESTING 08
REFERENCE SIZE FOR DIFFERENT DOGS 09
FAQ 10
WARRANTY 12

STATEMENT

Thank you for purchasing the remote dog training collar PD 529A-TIO, this product has been tested to meet your stringent quality standards, and also covered with warranty for 12 months from the date of its original purchase. Please contact us with your order ID and problem or issue, we will respond within 24 hours.

This warranty is void if the defect is caused by accidental damage, misuse, abuse, neglect, improper repair or alteration by unauthorized persons, or a failure to follow operating instructions provided with the product including adding essential oils directly into the tank and base.

This warranty does not apply to normal wear and tear or commercial use. In no event shall liability exceed the purchase price paid by the purchaser of the product. under no circumstances shall there be liability for any loss-direct, indirect or incidental-or consequential damage arising out of, or in connection with the use of the product.

SAFETY INSTRUCTION

Training collars are used to train the dogs and not for punishment. Use properly with care and the collar can be a safe and effective tool to train. Building communication and strengthen your bond with your best friend. Obey all safety messages that follow this instruction to avoid possible injury.

If your dog has heart disease, high blood pressure, cerebral thrombosis, skin allergies, etc., please do not use it.

REINFORCE LEARNING BEHAVIOURS

If your dog knows the command but responds inconsistently with your requirement, a training collar can sharpen his skill.

For example, you have taught your dog to come when calling, but over time he responds slower. You can communicate with him via the remote transmitter, so that he can respond to your call immediately.

1. Set the collar to initial stimulation level and test it.

2. Fit the collar on your dog's neck along with his regular collar.

3. Let him roam around the training area. Then give the command and press the stimulation button simultaneously.

4. If your dog moves toward you, stop the stimulation and praise him.

5. If he stops before he reaches you or turns away, repeat the command and continue the stimulation. Again, stop at the instant he runs to you and rewards him by praising him or feeding him a treat. Repeat this for 3 or 4 times.

Tips

1. If he doesn't respond to the training in the first few times, don't give up or increase the stimulation. Instead, try working on the training for a few more times.
2. During the training period never give the command if you are not able to enforce it. Your dog has to make the mental connection between the static shock/vibration/beep to his behavior (may take a week or more for some dogs).

Altogether, both methods of stopping unwanted behavior and reinforcing learning behaviors can be applied to nearly every training scenario.

INSTRUCTION OF AUTOMATIC FUNCTION

The automatic anti-barking function is closed when out of the factory, please turn it on when needed.

1.Turn on and turn off automatic anti-barking function:

Turn on the automatic anti-barking function: Press the ⏻ button of the remote transmitter for 3 seconds, when hearing 'beep' 1 time from receiver, the automatic anti-barking function opened;

Turn off the automatic anti-barking function: Press the ⏻ button of the remote transmitter for 3 seconds again, when hearing 'beep' 2 times from receiver, the automatic anti-barking function closed.

2. Automatic bark mode sensitivity level adjustment

Adjustment Steps: Please make sure the receiver is powered on. Quickly press the receiver power button 3 times, the receiver will emit a beep, judge the sensitivity level by the number of beeps.

Level 1: the receiver emits 1 beep;

Level 2: the receiver emits 2 beeps;

Level 3: the receiver emits 3 beeps;

Level 4: the receiver emits 4 beeps;

Level 5: the receiver emits 5 beeps;

Tips

The higher the sensitivity level means that the receiver is more sensitive and easier to activate the automatic mode. We recommend setting the sensitivity to level 3 first, and then adjust it according to your dog's situation.


3.How the automatic anti-barking collar works:

1st Work: Sound;
2nd Work: Sound + Vibration (weak);
3rd Work: Sound + Vibration (medium);
4th Work: Sound + Vibration (strong);
5th Work: Sound + Vibration (strong) + Static (weak);
6th Work: Sound + Vibration (strong) + Static (medium);
7th Work: Sound + Vibration (strong) + Static (strong);
The way of strengthening the stimulation progressively technique proves to be more humanized and effective.

4.The self-protection function of anti-barking collar:


1) To protect the dog, after the device works 7 times continuously, the indicator light will enter a fast flashing state and automatically turn on self-protection mode for 60 seconds, then the device will return to its initial state.
2) No matter how many times the device works, when the dog stops barking for 30 seconds, the device will return to the initial state.

BEFORE USING THE DOG TRAINING COLLAR

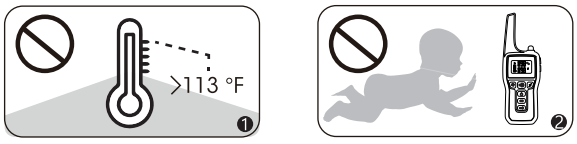

1. Do not expose to extreme heat or store at the temperatures above 113°F or 45°C.
2. Please always keep the dog training collar out of reach of children.
3. Charge the remote transmitter and receiver at least 2 hours when receive them. The collar can't receive any signals while it is being charged.

WHEN USING THE DOG TRAINING COLLAR

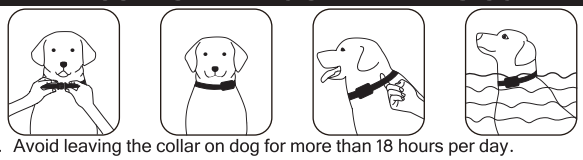

1. Avoid leaving the collar on dog for more than 18 hours per day.
2. If possible, please reposition the collar on the dog's neck every 1 to 2 hours.
3. Check the fit to prevent excessive pressure.
4. The charging rubber cap must be closely covered when your dog is swimming or the receiver will get broken when getting into water from the interface. Taking off the receiver is recommended.
5. The receiver will turn off automatically after 10 seconds "beep" sound when the battery is low.

PACKAGE CONTENTS

PD 529A-1-TIO (For 1 dog)

1 x Remote Transmitter	1 x Receiver
1 x Collar Strap	2 x Long Contact Points
1 x USB Charging Cable	2 x Short Contact Points
2 x Long Conductive Silicone Caps	1 x Test Lamp
2 x Short Conductive Silicone Caps	1 x User Manual
1 x lanyard	

PD 529A-2-TIO (For 2 dogs)

1 x Remote Transmitter	2 x Receivers
2 x Collar Straps	4 x Long Contact Points
1 x USB Charging Cable	4 x Short Contact Points
4 x Long Conductive Silicone Caps	1 x Test Lamp
4 x Short Conductive Silicone Caps	1 x User Manual
1 x lanyard	

PD 529A-3 -TIO (For 3 dogs)

1 x Remote Transmitter	3 x Receivers
3 x Collar Straps	6 x Long Contact Points
1 x USB Charging Cable	6 x Short Contact Points
6 x Long Conductive Silicone Caps	1 x Test Lamp
6 x Short Conductive Silicone Caps	1 x User Manual
1 x lanyard	


MAINTENANCE

1. Please examine regularly to ensure tightness of the receiver and eliminate any external damages.
2. Clean the screw caps with alcohol weekly.
3. Examine your dog's neck and clean up weekly.
4. The battery is rechargeable. In order to maintain battery life, please charge it every 2 months if it is not often used.

SPECIFICATIONS

Model	PD 529A-TIO
Function	Training Dogs
Working Modes	Beep,Vibration,Static Shock
Vibration and Static Shock Levels	1-100 Levels
Net Weight	Remote Transmitter:50g Receiver: 50g
Channels	3 Channels
Remote Range	1000m /1100yds/3300ft
Battery Capacity	Remote Transmitter:300mAh Receiver:650mAh
Working Time	Remote Transmitter: 180 days Receiver: 25-40 days
Waterproof Level	Remote Transmitter:IPX3 Receiver: IPX7

INTRODUCTION FOR THE BUTTONS

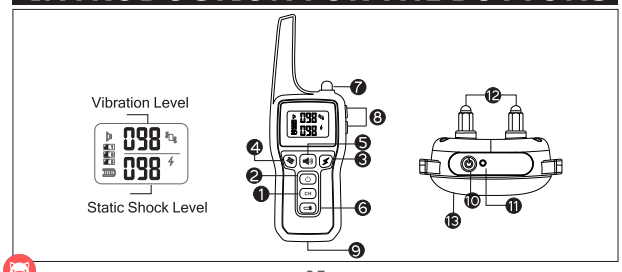

1. Signal Channel Button: Press this button, choose channel 1, 2 or 3 as the signal channel of dog training before pairing the signals between the remote transmitter and receiver.


   Note:


   PD 529A-1-TIO: For only 1 dog and 1 receiver, you can choose any signal channel for training your dog. Please remember the signal channel you choose, otherwise you have to connect the signal channel again when training your dog.


   PD 529A-2-TIO: For 2 dogs and 2 receivers, you can choose the same signal channel for 2 receivers, or you can choose 2 different signal channels. Please remember the signal channel for each receiver.

   PD 529A-3-TIO: For 3 dogs and 3 receivers, you can choose the same signal channel for all 3 receivers, or you can choose 3 different signal channels. Please remember the signal channel for each receiver.
2. Power Button/Keylock of The Remote: Press to turn the remote transmitter on and off.
3. Static Shock Button: Press the static shock button and the receiver will emit a mild static shock.
4. Vibration Button: Press the vibration button and the receiver will vibrate.
5. Tone Button: Press the tone button and the receiver will beep .The tone function is not adjustable.
6. LED Light Button
7. LED Light
8. The +/- button: Reduce and raise the vibration and static shock level.
9. Charging Port of the Remote Transmitter.
10. Power Button of the Receiver
11. Indicator Light of the Receiver
12. Contact Points: Choose a suitable length to fit for different thickness of dog's hair.
13. Sensor Hole: When the dog barks in automatic mode, it will activate the device to work automatically.

OPERATION AND CHARGING







How to choose the USB charger

Please choose the USB charger with the parameters below (we can charge the device by the charger of smart phone or laptop/computer USB interface, before that please check if the charger is with the following parameters):
Input: 100-240V ~ 50-60Hz
Output: 5V 1000mA (or 300mA/500mA)

Charge the remote transmitter

1. Connect the charger cable to the charging port.
2. Plug the charger into a standard socket.
3. The battery icon will flash during charging and be solid when charging is completed.

Charge the receiver

1. Remove the rubber cover, connect the receiver to a charger into a standard socket.
2. The red indicator light will flash slowly when the receiver is charging. After fully charged, the red indicator light keeps on.

Turn the receiver on and off


1. Turn On: Press the power button once, the receiver will make a short "beep" sound, means that the receiver is turned on.
2. Turn Off: Press the power button once, the receiver will make a long "beep" sound and the indicator light is not flash any more.

Check the receiver power

When the receiver is turned on, press the power button twice quickly to check the power:
Receiver beeps 5 times, representing 100% (80-100%)
Receiver beeps 4 times, representing 80% (60-80%)

Receiver beeps 3 times, representing 60% (40-60%)
Receiver beeps 2 times, representing 40% (20-40%)
Receiver beeps 1 time, representing 20% (1-20%)

HOW TO WEAR RECEIVER COLLAR CORRECTLY

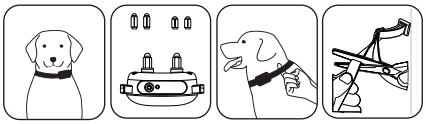


Wearing the correct position helps healthy and effective dog training.
1. Receiver shall be placed at the side of dog's neck, and the screw caps must contact the dog's skin directly.
2. If your dog has thick hair on the neck, please use longer screw caps.
3. The space between receiver collar and the dog's neck shall be maintained to a finger distance, which can't be too loose, otherwise static shock effectiveness shall be badly influenced.
4. The extra part of the strap can be trimmed, or be handled with other methods.

PAIRING AND TESTING

How to pair the remote transmitter and receiver

1. Turn on the remote transmitter, press the CH button to choose a signal channel you want to use.
2. Hold power button on the receiver for 2 seconds, when the indicator light keeps flashing, press one of the function button like beep, vibration or static shock on remote transmitter to pair.
3. If you do not press the function button within 10 seconds, please pair them again.
4. If you have multiple receivers, you can choose the same signal channel or choose another channel for pairing.

Test the dog training collar



1. Static shock function test

Static shock function can not be seen with the naked eye, please use our test lamp. Press the static shock function button, the test lamp will flashing.

2. Vibration function test

Press the vibration function button, the receiver will vibrate.

3. Beep function test

Press the beep button, the receiver will make a beep sound.

1. You need to pair remote transmitter and receiver before using it on dog. Please follow the manual for the first time use.
2. Please remember the dog channel you chose and do not change to the others, or the receiver will not receive signals.
3. When the remote transmitter is turned off, all the functions are locked except for the light on the remote.

REFERENCE SIZE FOR DIFFERENT DOGS

Reference weight for dogs
Large Dog (Body height above 24 inch, Weight above 88 lbs)
Medium Dog (Height 16-24 inch, Weight 24.2-66 lbs)
Small Dog (Height 10-16 inch, Weight 8.8-22 lbs)
Mini Dog (Height under 10 inch, Weight under 8.8 lbs)

Size (Dog)	Neck (In)	Chest Measurement (In)	Back Length (In)	Type
Mini	7.8-8.6	9.8-11.8	17.5	Chihuahua, Yorkshire Terrier
Small	7.8-9.5	11.4-14.2	9	Chihuahua, Yorkshire Terrier, Poodle, Pomeranian
Medium	9.0-11.0	13.7-16.5	11	Maltese Dog, Shih Tzu
Large	9.6-12.2	16.2-18.5	12.2	Miniature Schnauzer, Pekingese
Large	11.8-13.4	18.1-20.8	13.8	Schnauzer, English Cocker Spaniel
Large	13.0-14.5	20.5-23.2	15.7	Beagle
Huge	17.0-18.9	30.0-33.0	23.6	Husky

FAQ

Q: How old my dog can use dog training collar?

A: DO NOT use on puppies younger than 6 months.

Q: Can I use dog training collar with more than one dog?

A: Yes,you can simply add one or two receiver collars to the system to control two or three dogs, because three dog channels are available with one remote transmitter.

Q: What should I do if my dog's neck becomes red and irritated?

A: Discontinue to use the dog training collar for a few days. If the condition persists beyond 48 hours, please ask your veterinarian to check. Continue to monitor your dog's skin condition closely even if the skin becomes normal.

Q: Can I attach a leash to the receiver?

A: NO. This will result in pulling the screw caps (contact points) too tightly against your dog's neck. Use a separate collar placed above the receiver.

Q: How do I know when to charge the batteries of the dog training collar?

A: For Remote Transmitter: The battery level icon will be displayed on the left down side of LCD screen. For Receiver: press the power button twice quickly to check the battery level, if only one beep is emitted, charge it in time.

Q: How long can I leave receiver on my dog?

A:The receiver is not designed to be worn constantly. We recommend to wear the collar on your dog less than 18 hours per day.

Q: How long should I process my training session for my dog?

A: Training sessions should be kept positive and short, it is better about 10-15 minutes for each time.

Q: What are the proper levels of static shock for my dog?

A: Try to find the best suitable levels of static shock for your dog starting from the lowest level. Excessive levels of stimulation will cause strong response from your dog.

Q: What is the effective distance of your dog training collar?

A: Without obstacles, the effective distance could be as far as 1000 meters between remote transmitter and receiver collar. However in reality, a list of factors, including telecom signal station, magnetic field, obstacle, battery volume, other wireless devices nearby, land form, vegetative cover, etc, will influence transmission of signals from remote transmitter and the actual effective distance of the remote transmitter.

Q: Once my dog is trained and has obeyed to my commands, is it still necessary for my dog to continue wearing the receiver?

A: Yes, you may need to reinforce your dog's memory with the receiver from time to time.

Q: Any other better training methods?

A: You can prepare some dog food for training incentive to achieve better training outcomes.
Each time after you restrain your dog's misbehavior, you can tell your dog what is supposed to do and what is not.
And after a few times of repetitions,your dog will understand what you like and what you don't like.

Q: I want to test static shock function of receiver collar myself, but it does not work, is anything wrong?

A: If you test receiver collar by your hand or leg, please touch the 2 screw caps (contact points) at the same time, touching only one screw cap (contact point) will not work.

Q: The dog training collar does not work, or my dog does not respond after correct installation of the dog training collar, how should i solve this problem?

A: 1. Make sure the battery of remote transmitter and receiver collar have enough power to operate.
2. Check to see if receiver collar is turned on.
3. Check signal channel button on remote transmitter to ensure signal channels are correctly configured.
4. Try to pair the remote transmitter and receiver again.
5. Take off receiver collar and test all of the three functions work properly.
6. Make sure receiver collar is properly worn and the receiver collar is not loose.
7. Trim your dog's hair where the screw caps (contact points)can touch the neck.

WARRANTY

This product is covered with warranty for 12 months from the date of its original purchase.

Any defective part will be repaired or replaced at no charge if the appliance has not been tampered with and has been used according to these printed directions.

If any problems occur, please contact the local dealer immediately to launch a warranty claim. Our consumer service representative will respond within 1 business day, advise you how to correct the problem yourself or instruct you on how to return the defective unit back to us for repair or replacement.

CE FC IC RoHS Made In China