
Sunco

1X4 SELECTABLE CEILING PANEL

Easily replace outdated tubes and fixtures with this dimmable, lightweight 1x4 LED Panel. Optimize focus and productivity in your space by adjusting the brightness (30W, 40W, 46W) and selecting the best color temperature (3500K, 4000K, 5000K) to suit your needs.

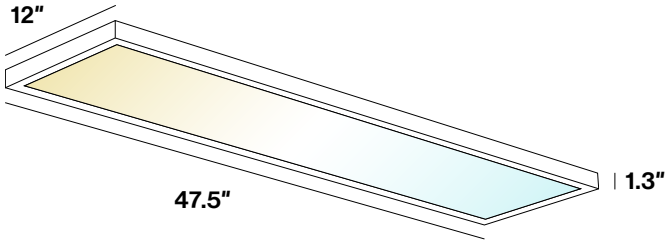


MODELS

PN14_SW-WH-3550K-#PK
PN14_SW-BK-3550K-#PK

LIGHT DISTRIBUTION ANGLE

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

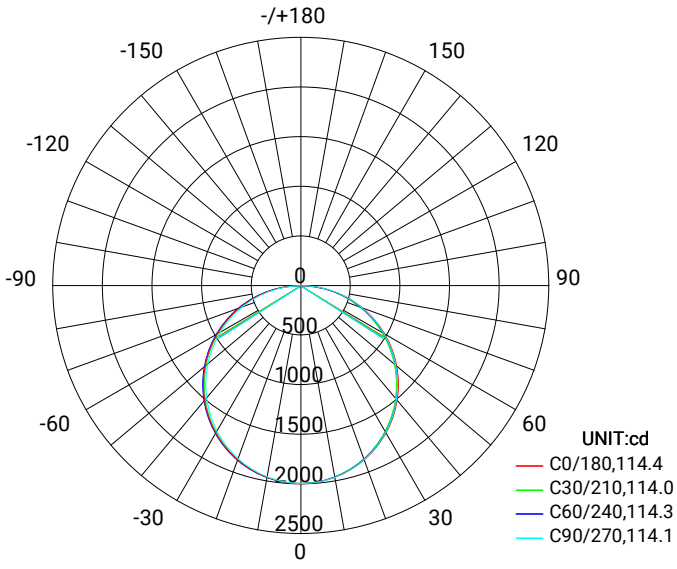

AVERAGE BEAM ANGLE(50%):114.2 DEG

NOTE: The curves indicate the illuminated area and the average illumination at different distances.

CERTIFICATIONS

c UL us LISTED

DLC QPL LISTED

SPECIFICATIONS

Voltage	**120-277 VAC**
Selectable Wattage	**30W/40W/50W**
Power Factor	**>0.9**

LIGHTING PERFORMANCE

Lumens	**3750lm, 5000lm, 5700lm**
Selectable Color Temperature	**3500K/4000K/5000K**
Color Rendering Index	**80+**
Beam Angle	**120°**
Dimmable	**0-10V**
Efficacy	**110 lm/w**

ENVIRONMENT

Operating Temperature	**-4°F to 113°F**
Moisture Rating	**Damp Rated**

CONSTRUCTION

Housing Material	**ALU6063+SPCC+PS**
Weight	**5.25 lbs**

LIFETIME

Average Lifetime	**50,000 Hours**
Warranty	**7 Years**

Sunco

1x4 SELECTABLE CEILING PANEL

Easily replace outdated tubes and fixtures with this dimmable, lightweight 1x4 LED Panel. Optimize focus and productivity in your space by adjusting the brightness (30W, 40W, 46W) and selecting the best color temperature (3500K, 4000K, 5000K) to suit your needs.

BRAND	MODEL
LUTRON	DVTV-WH
LUTRON	MS-Z101-WH
LUTRON	NFTV-WH
LUTRON	NTSTV-DV-WH
LEVITON	AWSMT-7DW
LEVITON	DD710-BDZ
LEVITON	DS710-10Z
LEVITON	DSE06-10Z
LEVITON	IP710-LFZ
LEGRAND	RH4FBL3PW
LEGRAND	WS4FBL3PW
MAXXIMA	MEW-DM650
PHILIP	SR1200ZTUNV
COOPER	SF10P-W

We highly recommend using a ELV (electronic low voltage) dimmer compatible with LED lights. Buzzing or flickering is typically an indication that the dimmer and lights used are not compatible. Please consult dimmer manufacturer for maximum wattage capacity.

*May experience “pop-on” behavior, in which lights cannot be turned on immediately to their minimum level. To resolve this issue, first raise the slider switch above the minimum level to turn the lights on, then dim to a lower light level as needed.