QUICK START GUIDE

ZUMIMALL®

Get Smarter About Your Security

FHD Battery Security Camera

Warranty Service

Thanks for your shopping and trust.
We have been optimizing our products and improve our lifetime customer service to offer you a better shopping experience.
If you have any problems, please feel free to send us an E-mail.
We will solve your problems **within 24 hours**. In addition, your advice or suggestions will be much appreciated and welcomed.

Product Service
Email: Support@zumimall.com
Distributor: distributor@zumimall.com

More About Us
Web: www.zumimall.com
Facebook: www.facebook.com/zumimalloffice

Brand Story

Founded in 2008, Zumimall focuses on the design and research of intelligent security technology. Zumimall insists on taking consumer needs as its core and strives to create smart home products that lead a global home fashion trend for consumers. Zumimall believes that craftsmanship creates top quality and technology changes life. With high-quality products and first-class service, Zumimall won the love and trust of millions of customers as soon as it went public. Over the years, Zumimall has served 45 continents of America, covering 80% of the population. Zumimall is the provider of a smart lifestyle and a guardian of the wonderful moments of your life.

INDEX PAGE

1. What's in the Box -F5 ---------- P1

1.1 Product Diagram-F5 ---------- P2

1.2 What's in the Box- Q6 ---------- P3

1.3 Product Diagram -Q6---------- P4

2. Download and Install App ----------P5

3. Account Registration ----------P6

4. Add Camera to App ----------P6

4.1 Preparations for Connection ----------P6

4.2 Connect Camera to App ---------- P7-P8

5. Reset Camera ----------P9

6. Camera Installation ---------- P10

7. Important Notes ---------- P10

8. Monitoring Area ---------- P11

9. Device Menu ----------P12

10. Two-Way Audio ----------P13

11. PIR Body Detection ---------- P13

11.1 Body Detection Alarm Setting ----------P13

INDEX **PAGE**

11.2 Alarm Notifications ----------P14

11.3 Record/Playback/Delete ----------P14

12. Power Saving Settings ---------- P15

12.1 Alarm Interval & Shooting Interval ---------- P15

12.2 Maximum Shooting Time & Recording Time ----------P15

12.3 Alarm Plan ---------- P16

13. Battery Management ---------- P17









14. Solar Panel ---------- P18-P19

15. Multi Device Management ---------- P20

15.1 Multi Camera Management ---------- P20

15.2 Multi User Sharing ---------- P20

1. What's in the Box-F5











Battery Camera
Outdoor Mount
Charging Cable
Screws Set


Quick User Guide
Magnetic Bracket
3M Adhesive Tapes
Solar Panel

NOTE: Micro SD card and power adapter are not included.


1.1 Product Diagram-F5



① LED Indicator
② IR Lamp
③ Camera Lens
④ Spotlight









⑤ PIR Sensor
⑥ Microphone
⑦ Speaker
⑧ Silicone Rubber



⑨ Power Button
⑩ Charging Port
⑪ SD Card Slot
⑫ Reset Hole

Power Button	Keep pressing for 5-10 seconds to power on/power off
Reset Button	Keep pressing for 5-10 seconds to reset
Blink Slowly in Red	Awaiting Wi-Fi connection, ready for adding devices
Blink Fast in Red	Wi-Fi connecting
Solid in Red	Network problem
Solid in Blue	Wi-Fi connected, camera running normally
Blink Slowly in Blue	Firmware update

1.2 What's in the Box-Q6









Battery Camera
Outdoor Metal Mount
Quick User Guide

Screws Set
Charging Cable
Solar Panel

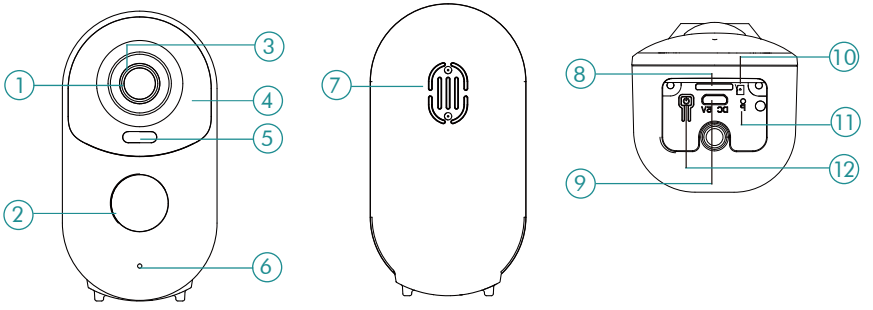NOTE: Micro SD card and power adapter are not included.

1.3 TProduct Diagram-Q6



① Camera Lens
② PIR Sensor
③ LED Indicator
④ IR Lamp
⑤ White Light
⑥ Microphone
⑦ Speaker
⑧ SD Card Slot
⑨ Charging Port
⑩ Charging Status
⑪ Reset Hole
⑫ Power Button


Power Button	Keep pressing for 5-10 seconds to power on/power off
Reset Button	Keep pressing for 5-10 seconds to reset
Blink Slowly in Red	Awaiting Wi-Fi connection, ready for adding devices
Blink Fast in Red	Wi-Fi connecting
Solid in Red	Network problem
Solid in Blue	Wi-Fi connected, camera running normally
Blink Slowly in Blue	Firmware update


2. Download and Install App

Download ZUMIMALL App from Google Play™ or App Store™.
Or scan the QR codes as below, with your smart phone.
NOTE: Google Play™ is a trademark of Google Inc.
App Store™ is a service mark of Apple Inc.

iOS ZUMIMALL Android


NOTE: Please turn on both of the following permissions.
① Allow ZUMIMALL App to access mobile cellular data and wireless LAN, otherwise it will fail to connect the camera.
② Allow ZUMIMALL App to receive pushed messages, otherwise, the phone will not receive alarms when motion is detected.

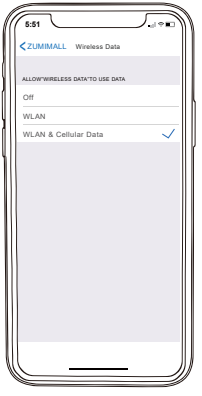

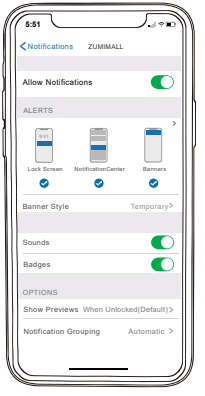

3. Account Registration

New user needs to sign up ZUMIMALL App with email address. Click 'Sign up' to create a New Account and follow the steps to complete registration.

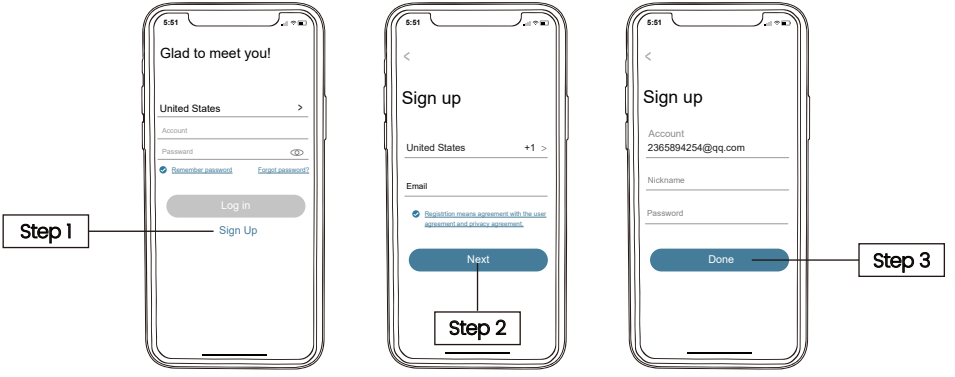

4. Add Camera to App


4.1 Preparations for connection

① Insert a Micro SD Card into the camera to save video clips or you can start the 7-day free cloud service. Without Micro SD Card or cloud service, no video will be saved.


② The camera only works with 2.4GHz Wi-Fi, not support 5GHz.

③ When connecting to the network, please take the camera close to the router (Recommended within 10-15ft).


4.2 Connect Camera to App

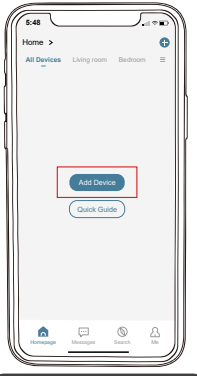


Tap 'Add Device'

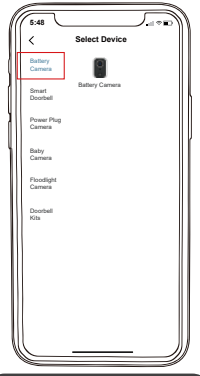

Select 'Battery Camera'

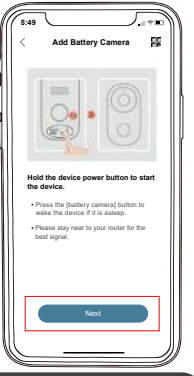

Turn on the Camera

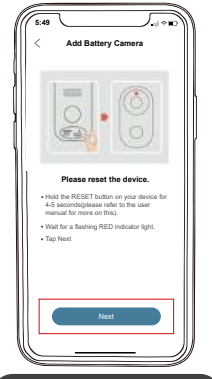

Reset the Camera



Input Wi-Fi Password



Prepare the Scanning




Scan QR Code when Indicator Flashing Slowly in Red



Finished Installation When Reaches 100%



Perform Network Diagnosis

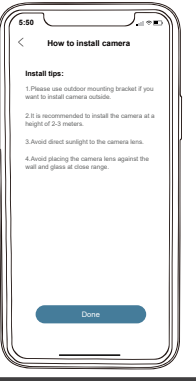


View Installation Tips

5. Reset Camera

① Keep pressing to remove device


② Press the reset button for 5-10s until hear the 'Boogu' sound

③ Reconnect as before...

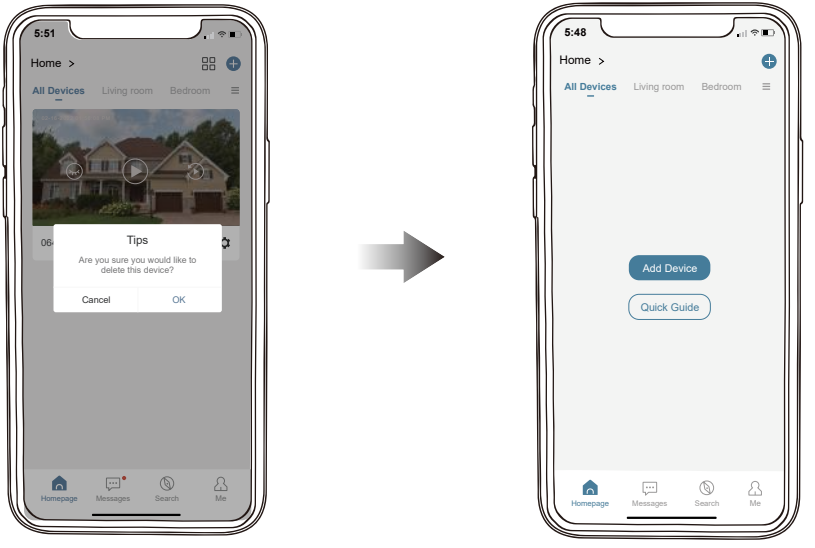

6. Camera Installation

① Fix the bracket to where you want to install the camera with the supplied screw.
② Fasten the camera on the metal mount, and fix them.
③ Adjust the viewing angle of the camera.
NOTE: Move the lens horizontally and tilt it
The camera len supports horizontal rotation of 355° and vertical rotation of 120°. You can adjust the orientation of the camera len and get the best monitoring angle by clicking PTZ in the application and holding down up, down, left, and right.



7. Important Notes


⚠ To reduce false alarms, please note that:
① Do not install the camera in a position facing strong lights/mirror/window/ swimming pool.
② Do not place the camera too close to any angel with busy traffic. Recommended distance between the camera and motion objects is within 32ft.
③ Keep camera away from the outlets, including air conditioner vents, humidifier outlets, the heat transfer vents of the projectors, etc.
④ Keep the camera at least 1 meter away from any wireless devices to avoid interference, such as microwave stove, Wi-Fi routers and etc.


8. Monitoring Area

① It is not suggested to install the camera vertically towards the moving objects, otherwise, it may not detect the motion events or cause delay.

② It is suggested to make the angle between PIR Sensor and detected objects more than 10 degrees.

③ The camera motion sensor is much more sensitive to side-to-side movement across its field of view than to movement directly toward or away from the camera.






Suggestion:the best downward tilt angle of the lens is 15° to obtain the best alarm detection range.


Recommended installation height: 8-10 feet above the ground,at this height, the sensor will provide a detection distance up to 40 feet.

9. Device Menu

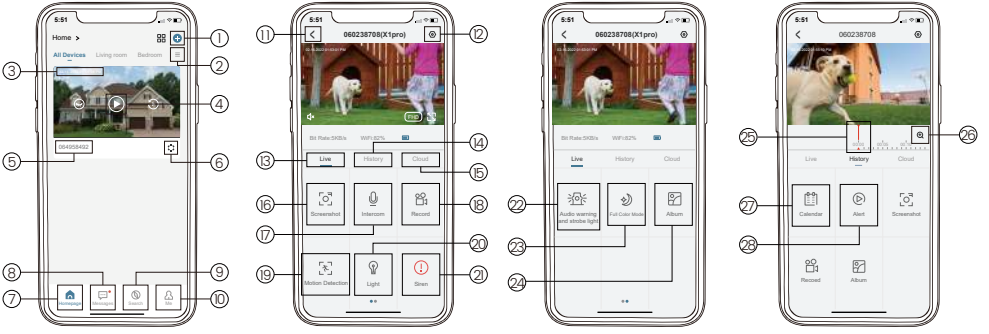

1	Add Camera	16	Screenshot to Phone
2	Device List	17	Two-Way Talk
3	Real Time	18	Record to Phone
4	Live View Button	19	Motion Detection On/Off
5	Camera Name	20	Light
6	Settings	21	Siren
7	Device Homepage	22	Audio Warming and Strobe Light
8	Messages	23	Full Color Mode
9	Explore	24	Album
10	Personal Homepage	25	Time Bar
11	Quit Live Viewing	26	Calendar
12	Setting Manual	27	Alert
13	View Live	28	Zoom
14	SD Card History		
15	Cloud Storage		

10. Two - Way Audio




① Open the microphone permission of ZUMIMALL APP.
② Long press the intercom button to start speaking, and the sound will be emitted from the camera at this time.
③ Release the intercom button to listen to the speech, and the sound will be emitted from the mobile phone.

11. PIR Motion Detection

11.1 Motion Detection Alarm Setting

Motion detection sensitivity can be adjusted from 1 to 10 .
Please refer to the image below.

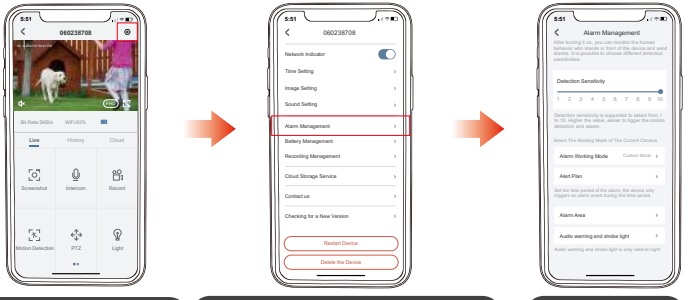

Tap on 'Settings' | Select 'Alarm Management' | Set it up

Sensitivity	Detecting Distance (For moving and living objects)
LOW: 1-3	13-16ft (4-5meters)
MID: 4-7	16-23ft (5-8meters)
HIGH: 8-10	23-42ft (8-13meters)


NOTE: The higher the sensitivity is, the longer distance the PIR can detect. Accordingly, the battery will drain faster.

11.2 Alarm Notification

This camera does not support 7*24 hours all day recording, it is an event recording camera. It is only triggered when body motion is detected.
Here are system's reactions:
① Alarm notifications with sounds from App.
② Pictures/videos automatically stored in Micro SD Card or Cloud.

11.3 Record/Playback/Delete

① On 'MESSAGES' page, click 'Alarm Messages', you can view all the records listed.
② Click the following buttons to playback or delete.
③ All screenshots or manually recorded videos on live/history/ cloud page will be saved in Pictures & Videos. Files here can be saved in your phone Album or shared with others directly.

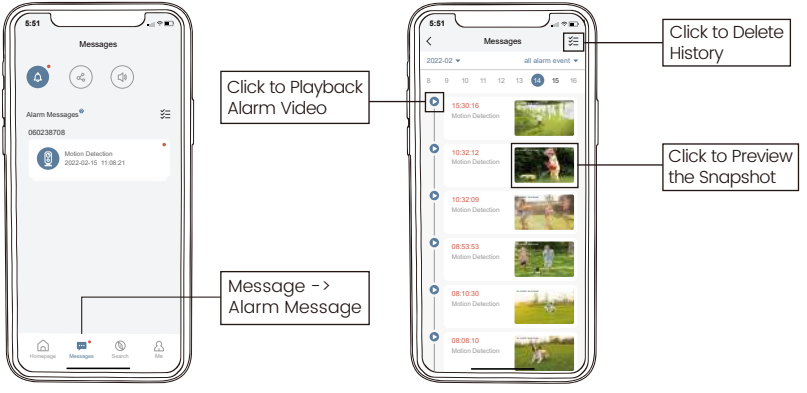

12. Power Saving Settings


12.1 Alarm Interval


This is a function that avoids repeated alarms for the same event.
You can choose an alarm interval of different lengths, if the interval is 5 minutes, then the camera is triggered at 08:00, you will receive an alarm message, and you will not receive a new alarm push in the next 5 minutes, even if motion detection continues to occur.


NOTE: This function is off by default, you can set it as needed.

12.2 Recording Time

You can choose a different recording length if you set the recording length to 20 seconds, then after the camera is triggered, you can view the 20 seconds of alarm video in the history of cloud playback.

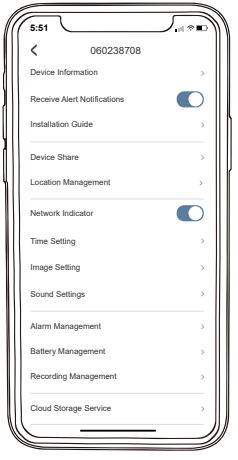

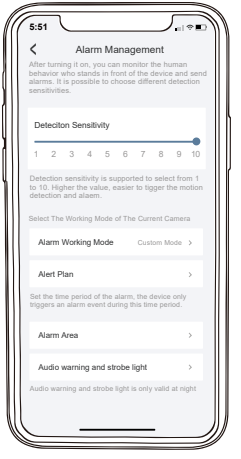


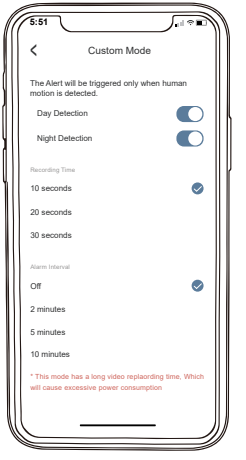



12.3 Alarm Plan

You can set the weekly/daily alarm schedule as you need. If you set the camera's working hours from 0:00 to 1:00 .The camera will only be triggered and record alarm video during this time period.

NOTE: Alarm schedule can be set for up to 4 time periods.

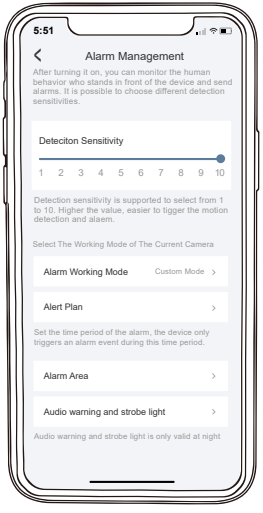

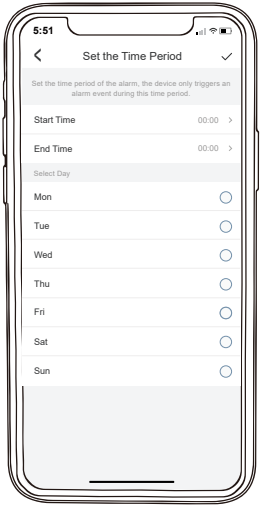

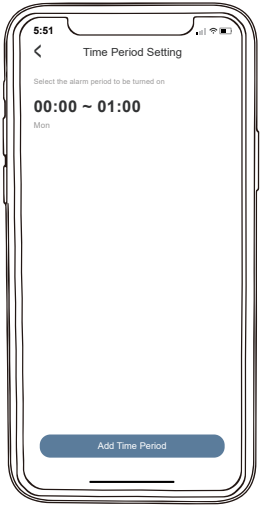

13. Battery Management


① The camera has a built-in high-capacity battery, which can be used for 2-3 months, assuming the camera wakes up 15 times per day and play video for 10 minutes each day.

NOTE: The battery durability depends on how frequently the camera is woken up. The more it wakes up, the faster the battery drains. It is recommended to lower down the 'Motion Detection' sensitivity or turn it off occasionally.

② When power is less than 20%, the App will send you reminding messages for charging in time.

③ Charge the camera with DC 5V 2A charger, until it is fully charged after 6-8 hours.

14. Solar Panel

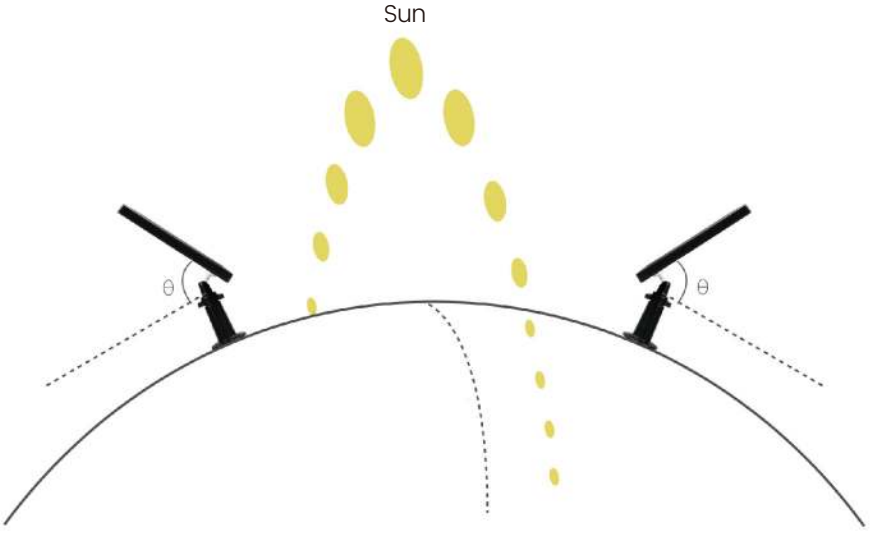


The Northern Hemisphere | The Ideal Angle=The Local Latitude ± 5° | The Southern Hemisphere

Step 1:

Please find a place which has sunlight for most of a day and adjust the angle to make sure maximum exposure.


The ZUMIMALL solar panel needs few hours of direct sunlight to convert solar energy into electricity. The conversion efficiency is affected by weather conditions, seasonal changes, geographic locations, etc.

Step 2:
Mount the bracket with the mounting template and the screws provided in the package



Step 3:
Slot the solar panel into the bracket and make sure it's secure

Step 4:
Loosen the adjusting control on the bracket and adjust the angle of the solar panel to make it receive direct sunlight, and then retighten the adjusting control to secure your setting

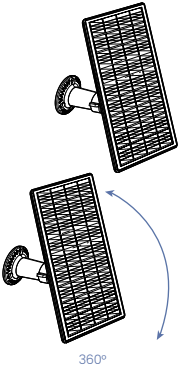


Step 5:
Connect the solar panel to the ZUMIMALL Camera with the micro USB cable.

Important Notes:
① Make sure that there is NO blocking on the solar panel. The energy harvesting efficiency drops drastically even when a small portion of the solar panel is blocked.
② Please don't install the solar panel completely horizontally. Otherwise your solar panel might accumulate dust and other debris easily. It's advised to install the solar panel angularly to make it receive direct sunlight.
③ Wipe the solar panel regularly to remove the dust or debris.

15. Multi Device Management

15.1 Multi Camera Management

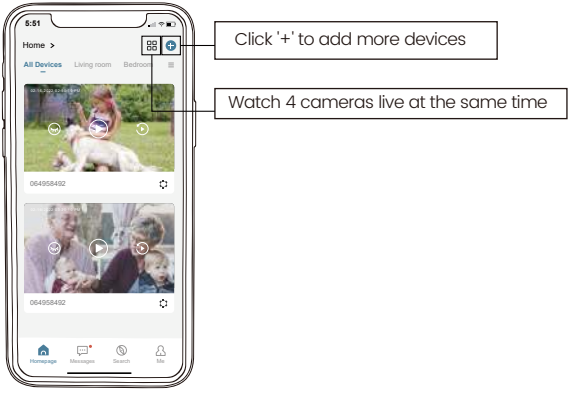




15.2 Multi-User Sharing


NOTE: One App account (A) can't login on multiple devices at the same time.
One camera can't be connected to multiple App accounts either.
But camera can be shared form A to B.

Share steps:


① B download ZUMIMALL App to his/her phone and create a new account in the App.
② Click 'Add' in App on A's phone.
③ A scan B's QR Code or input B's account ID.
④ B accept share and refresh the device page.

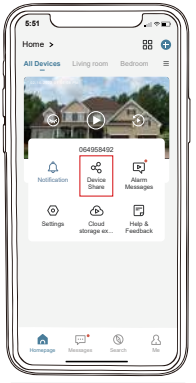


Click Device Share

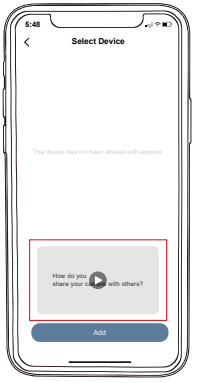

Watch the instructional video and click Add

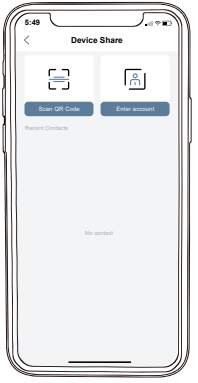


Two ways to share

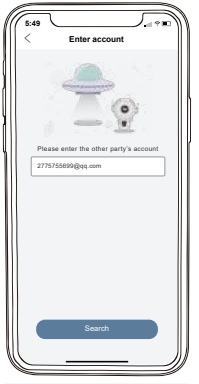


Scan other people's QR code



Enter other people's account

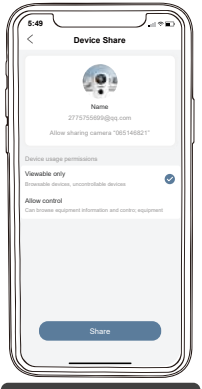

Select device sharing permission

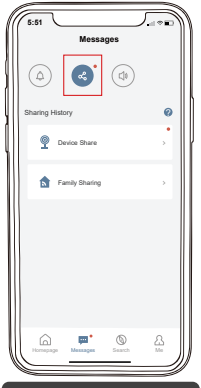

The shared person clicks Device Share




Click to accept, the sharing is successful


If you have other questions, please send us the SN number of your camera and describe the problem you have encountered, we will solve it as soon as possible.

Email: Support@zumimall.com


How to find SN number?

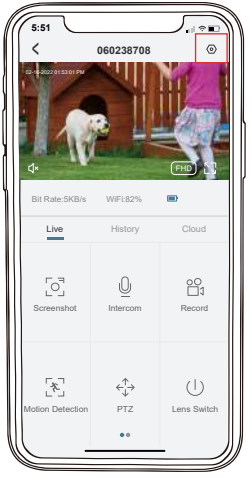

Click Settings

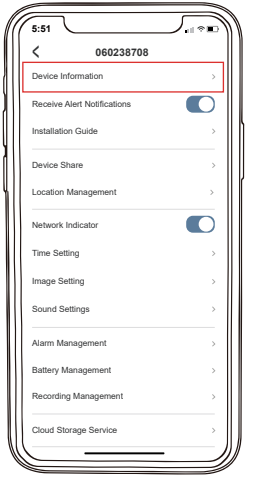

Click Device Information

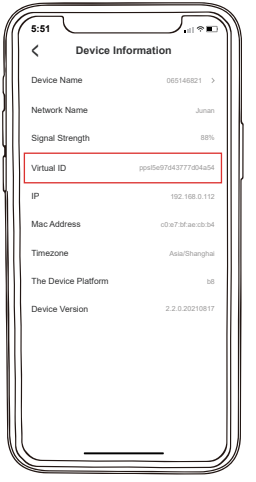

View Virtual ID