20 YEARS LIMITED BASIC WARRANTY CERTIFICATE ON CORRO-PROTEC SYSTEM

THE WARRANTY GIVEN BY HPA GROUP PURSUANT TO THIS CERTIFICATE SHALL BE SUBJECT TO COMPLIANCE WITH THE FOLLOWING TERMS AND CONDITIONS:

1. The Corro-Protec system shall be installed inaccordance with the instructions of the manufacturer and shall be continuously in the power "ON" position (pilot light ON). This warranty shall not apply if the Corro-Protec system has not been kept in a power "ON" position continuously since its installation.

2. The Corro-Protec system and the water heater shall not be installed anywhere where the latter may be damaged by an external cause. HPA Group denies any liability with respect to damages, whether direct or indirect, including a loss of property, caused by water damage suffered by the owner of the apparatus or a third party.

3. The warranty shall not apply if the Corro-Protec system is damaged by fire, frost or flooding, an event of major force, or any other unpredictable circumstances over which HPA Group has no control.

4. The Corro-Protec system shall be inspected, visually, in accordance with the instructions of the manufacturer. The warranty shall not apply, in particular, if the pilot light is not "ON" or if the Corro-Protec system is shut off; if the Corro-Protec system is used while the tank is not completely full of water; or if the level of sedimentary deposits causes a malfunction.

5. The Corro-Protec system shall be replaced in the event of a malfunction by a competent and qualified person, authorized by HPA Group or one of its authorized dealers, which person shall use replacement parts approved by the manufacturer, and the Corro-Protec system shall not other wise be altered or repaired in an inappropriate manner.

6. A claim pursuant to this warranty shall be submitted in writing, along with a copy of the original invoice of the Corro-Protec system. The claim shall be submitted within fifteen(15) days of the knowledge by the owner of the defect or dysfunction and received by HPA Group during the warranty period, at the following address :

   HPA Group
   PO box 52, Plessisville (Quebec)
   G6L 2Y6

   The claim can also be submitted online at the following address: www.corroprotec.com/warranty
   Should you have any questions, please contact our technical service department at : info@corroprotec.com

7. Upon request by HPA Group, you are required to supply additional information with respect to the purchase, and the use of the Corro-Protec system. The claim must be made in writing within fifteen (15) days of the discovery of a defect and you must deliver it personally to an HPA Group authorized retailer or request replacement on the www.corropro-tec.com website. *Corro-Protec is a HPA Group registered trademark.

Upon receipt of a valid claim pursuant to the warranty during the warranty period, HPA Group here by undertakes to replace, in its discretion, the anode and the current rectifier (here in after the Corro-Protec system) in case of a defect or dysfunction, pursuant to the terms and conditions set out in this certificate. This limited warranty covers only the replacement of the Corro-Protec system by an equivalent product, subject to the terms and conditions set out here after. The consumer shall be required to retain the proof of purchase. This Limited Warranty applies only to the original purchaser and do not apply to subsequent transferees. This warranty shall not apply to the water heater or to any other components making up the electrical water heater, which are subject to a separate warranty from the manufacturer.

No warranty may have a broader ambit than that described in this certificate. This warranty, to the extent authorized by law, represents the only warranty given, which cancels and replaces any other condition, warranty, representation or duty and obligation of HPA Group, of any nature what so ever, whether express or implied, and regardless of the basis there fore (contract, conduct, representation, negligence, manufacturer's liability principles, operation of law or any other origin) with respect to the Corro-Protec system, its fitness for use for a specific purpose, the use for which it is intended, its installation, its operation, its repair or replacement. HPA Group expressly denies the existence of any implicit warranty. The duties and obligations of HPA Group shall, under no circumstances, be greater than the cost of the defective parts. HPA Group shall not assume any transportation costs, cost of labour or installation, or any unanticipated costs in connection with the repair or replacement of the Corro-Protec system.

This warranty and the duties and obligations of HPA Group shall be governed and interpreted and construed in accordance with the legislation applicable in the Province of Quebec. This warranty shall, under no circumstances, limit the legal rights of the consumer pursuant to such legislation, to the extent that it is possible to waive such rights or for such rights to be replaced, in which case the provisions of this certificate shall be deemed to be amended accordingly. Not with standing the fact that any provision of this certificate may be invalid or void, in whole or in part, the other provisions contained there in shall remain valid. The only possible remedy available against HPA Group shall be the repayment of the initial purchase cost of the Corro-Protec system.

REGISTER YOUR WARRANTY AT :
HTTPS://WWW.CORROPROTEC.COM

The recording of the guarantee can be made on-line or by sending the present form by post to the following address:
HPA Group, C.P. 52, Plessisville (Quebec) G6L 2Y6.

Name of home owner

Installation date

Serial number of the anode

Model number of the water heater

Serial number of the water heater

IMPORTANT SAFETY INFORMAT

Read and follow all safety messages and instructions in this guide as well as in your water heater's use and care guide.

This is the safety alert symbol. It is used to alert you to potential physical injury hazards. Obey all safety messages that follow this symbol to avoid possible property damage, serious injury or death. Do not remove any permanent instructions, labels, or the data plate from either the outside of the water heater or on the inside of the access panels. Keep this manual near the water heater.

DANGER indicates hazardous situa tion that, if not avoided, will result in death or serious injury.

WARNING indicates a hazardous situa tion that, if not avoided, could result in death or serious injury.

CAUTION indicates a hazardous situa tion that, if not avoided, could result in minor or moderate injury.

NOTICE indicates prac tices not related to physical injury.

WARNING!
Read and follow all instructions, cautions, and warnings in this manual as well as in the water heaters' use and care guide. Failure to do so can lead to property damage, personal injury or death.

If you lack the necessary skills to install the Corro-Protec system properly, or you have difficulty following the instructions, do not proceed with the installation. Have a qualified person perform the installation.

The Corro-Protec system must be installed according to all local and state codes or, in the absence of local and state codes, the current edition of the "National Electrical Code", ANSI/NFPA 70.

INTRODUCTION

WARNING!
Electric Shock Risk Contact with electrical components can result in severe injury or death from electrical shock.

- Ensure that power to the module is disconnected before installing or servicing the Corro-Protec system.
- Electric water heaters only: Disconnect power to the water heater by opening the circuit breaker(s) before installation or service.
- Use a non-contact circuit tester to confirm that power is off before installation or service.

WARNING!
GAS WATER HEATERS:
Fire & Explosion Risk Shut off the main gas supply before servicing the water heater. Failure to do so can result in severe injury or death.

CORRO-PROTEC

BOX CONTENTS



1 1 Corro-Protec Anode 2 1 Electric Rectifier

TOOLS REQUIRED FOR THE INSTALLATION



1. Dielectric grease
2. Teflon tape
3. Universal pliers
4. Ratchet wrench with a 1 1/6" socket
5. Ratchet wrench with a 1 3/8" socket
6. Robertson screw driver (squared-headed)


INSTALLATION STEPS

1



Turn off power supply.

2

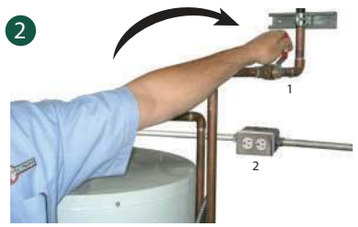

1. Turn off water supply.
2. Locate or install a 110 volts power outlet.

3



Release the water pressure from the tank.

4



Locate the magnesium anode (hexagonal) on top of the tank.
Notice : If you do not see the anode, go to step 4a

5



Using the ratchet wrench fitted with a 1 1/6" socket, unscrew the existing anode counterclockwise.

6



Slowly remove the original magnesium anode. Should you have to cut it into pieces due to limited space, be sure to hold the bottom to keep it from slipping inside the tank.

7



Cover the lower part of the screwable anode with teflon tape.

8



Insert the Corro-Protec anode.

9



Using the ratchet wrench fitted with a 1 3/8" socket, screw the Corro-Protec anode clockwise.
Notice : Do not use excessive force when tightening.

10



Install the black grounding connection on one of the tank cover screws.

11




Apply dielectric grease on the female connector (red).

12



Insert the female connector (red) in the exceeding end-piece of the anode and press firmly using the universal pliers.

13

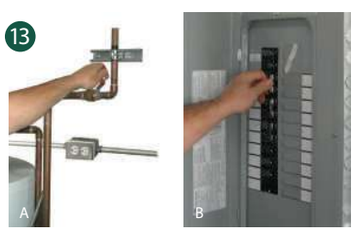

13A. Turn on water supply and mak sure the tank is full.

13B. Turn on electrical power.

14



Connect the electric rectifier in the 110 volts outlet.

15



The control light located on the rectifier of the Corro-Protec System will automatically light up upon connection thus providing the optimal protection for years to come!


RESERVOIRS WITH INTEGRATED ANODE

4a



Remove the safety valve from the top of the tank (it may also be on the side of the tank).

4b

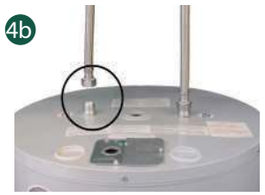

Unscrew the hot water outlet pipe.

4c



Put a Tee adapter and a 90 Degree elbow fitting on the water heater outlet.

4d



Add the safety valve to the top of the adapter and connect the outlet to the other end.

4e Continue installation as seen in step #7. You should install the Corro-Protec in the hole in which the safety valve was, initially. It is not required to withdraw the magnesium anode from the reservoir.

PARTS NEEDED



1. 3/4 Inch 90 Degree Elbow*
2. 3/4 Inch Tee*
3. 2x 3/4 Inch Nipple Pipe*

*Brass or Stainless

You can find this kit on www.corroprotec.com/shop