

# Installation Manual

STEP 1. Install the bracket


1.

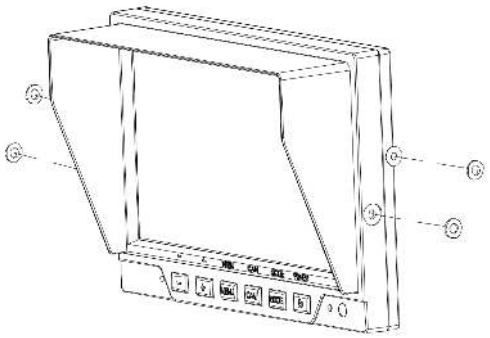


2.

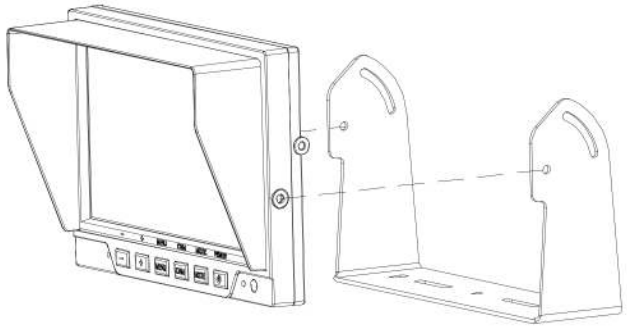


3.

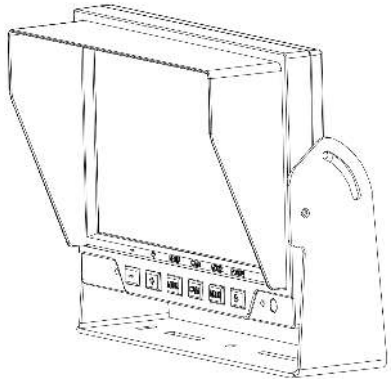

4.

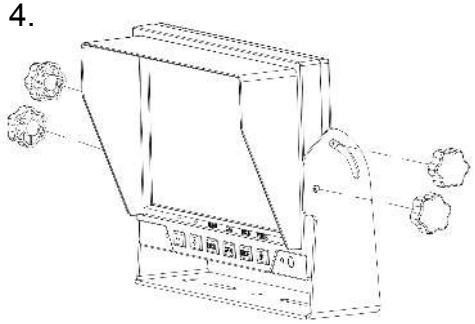


5.

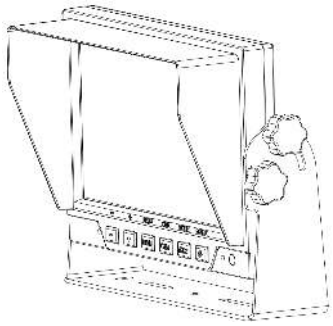

The monitor can be installed on dash or roof of your car.

STEP 2. Connect the split cable to monitor

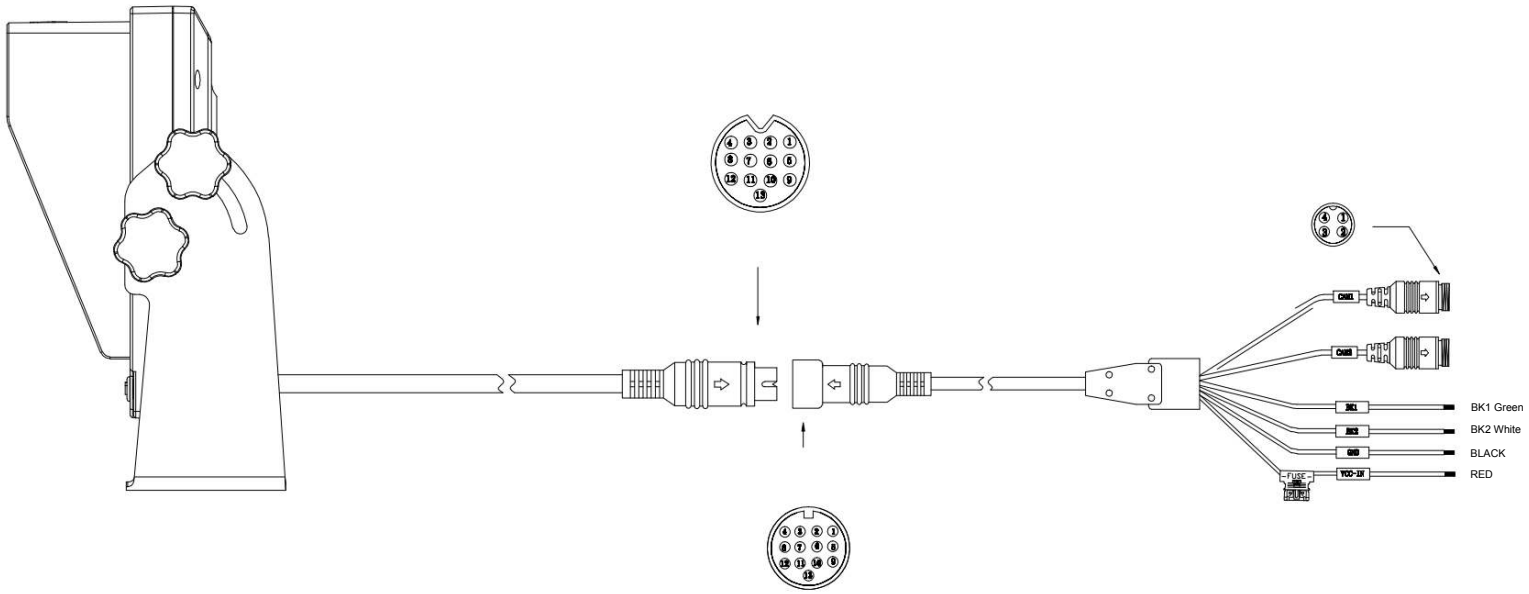


Firstly, conenct the monitor's 13 pin connector to the 13pin connector of the split cable. Make sure ⇨ ⇦ on the connectors face each other.

Secondly, connect the red and the black wires and the BK1/BK2 or the Green/White wires.

**Where to connec the red and the black wires:**

Method 1. The red and the black wires can be connected to the car battery(12~24V DC). Red for positive and black for nagetive. If they are connected to battery, please use a switch for the red wire to cut off power when not in use.

Method 2. The red wire also can be connected to the ACC power (12~24V DC), and the black to ground.

**Where to connect the BK1/BK2 or the Green/White wires:**


If the camera is connected to the connector marked with CAM1, then connect the BK1 to the reverse lighting system which is usually located near the rear light. So when you put the car into reverse, the monitor will be activated automatically by the BK1 wire to display the camera.

If your kit includes two camras, you can connect one of them to the reverse lighting system, and connect the other one to left/right turnning indicator power.

If you need the monitor to be ON all the time, the BK1/BK2 wire also can be kept blank, and just power the monitor via the red and the black wires, press the power button to turn it on.


**Please Attention：** the BK1/BK2 or the Green/White wires can never be connected to a constant power, e.g. car battery, otherwise the monitor won't be turned off and buttons may not work.

STEP 3 . Connect the extension cable(10meters/15meters) to the split cable via the 4-pin connectors.

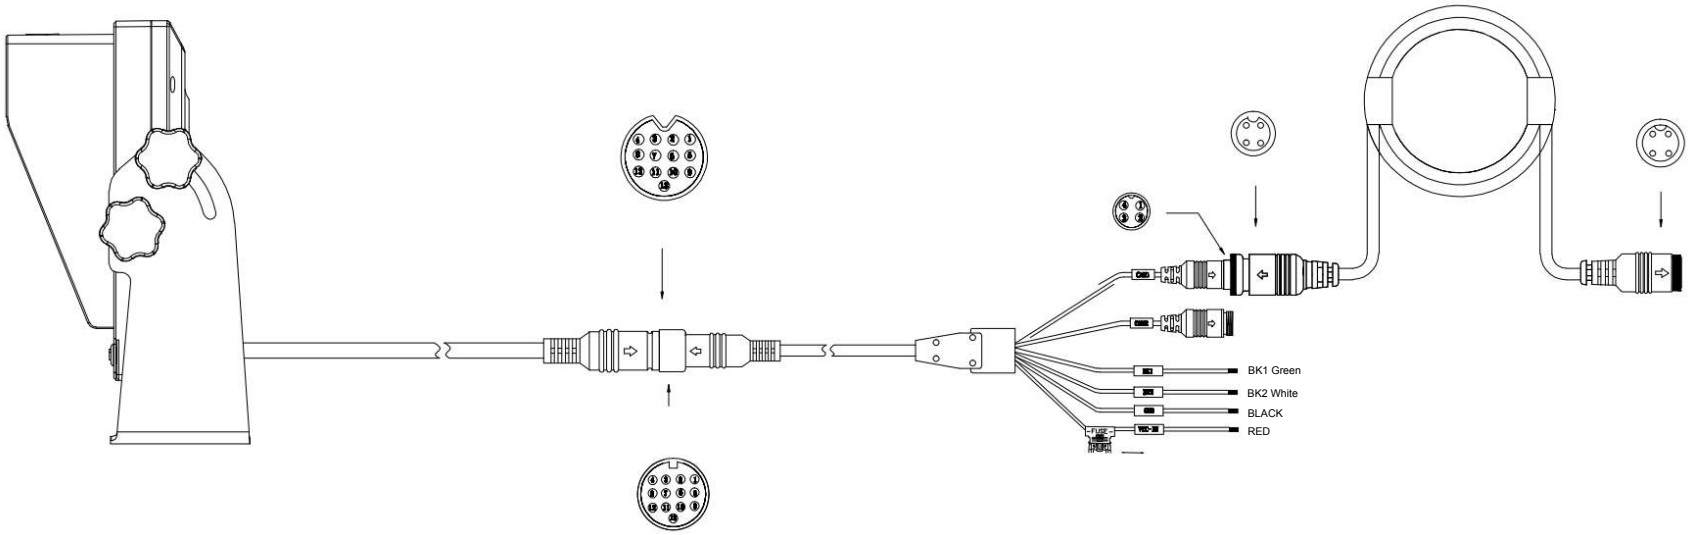


To run the extension cable from the cab to the end of the car or to other part of the car, and hide it in the roof or floor.

STEP 4 .Connect the Camera to the Extension Cable.

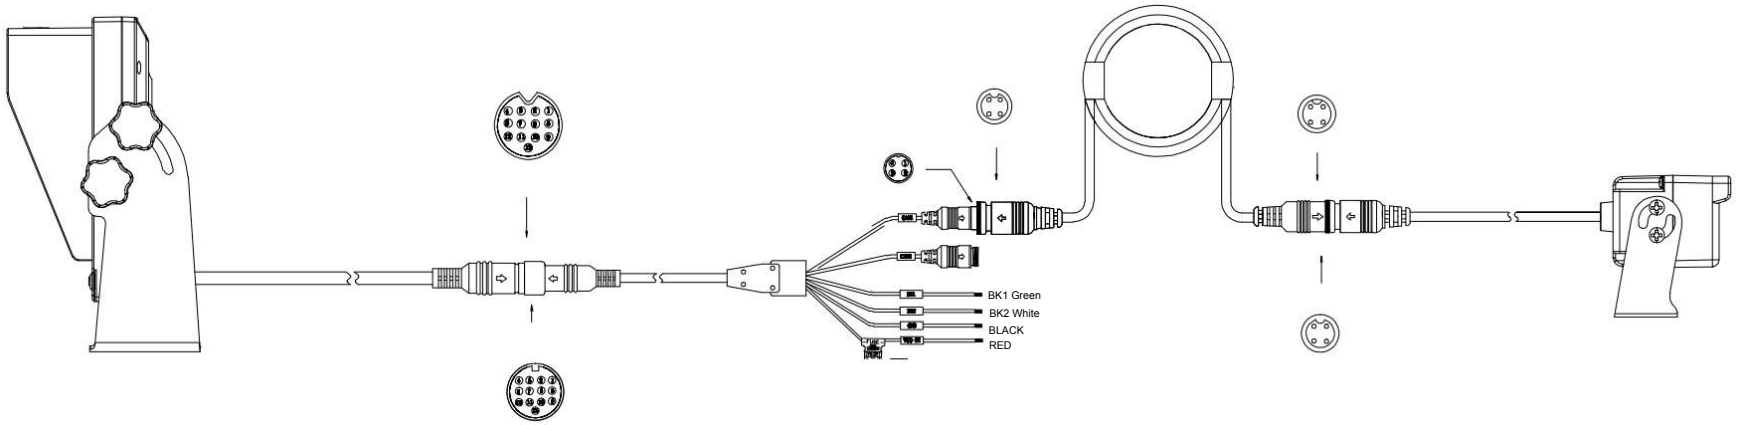


The camera can be installed in front/at back/on side of the car. Firstly you may need to drill a hole in your car to get the camera cable through, and then connect the camera’s 4-pin connector to the one of the extension cable.

All parts of the system have been connected. Start your car to power the monitor, press the power button to turn the monitor on to display image from the camera.