
2x4 LED CEILING PANEL WITH SELECTABLE CCT

Use the slider switch on the back of the ceiling panel to select your preferred color temperature (4000K, 5000K, 6000K) during recessed or suspended installation. Dust-proof and dimmable (0-10V), this fixture is ideal for use in offices, warehouses, storage units, and more.

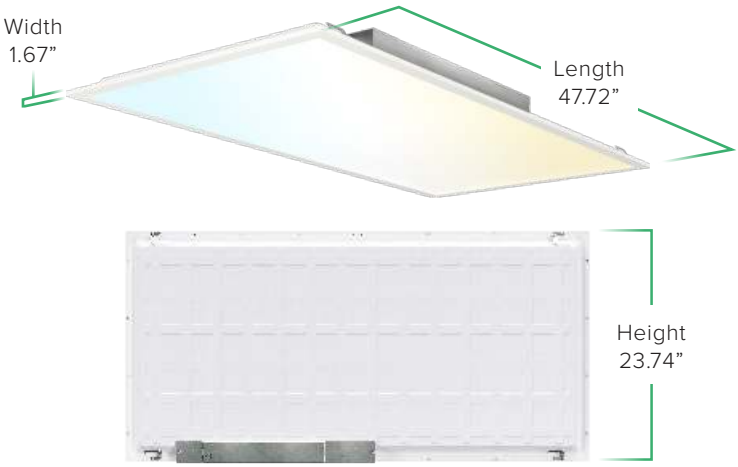


MODELS


PN_SM2x4-50W-0K-#PK

LIGHT DISTRIBUTION ANGLE

SPECTRUM DISTRIBUTION

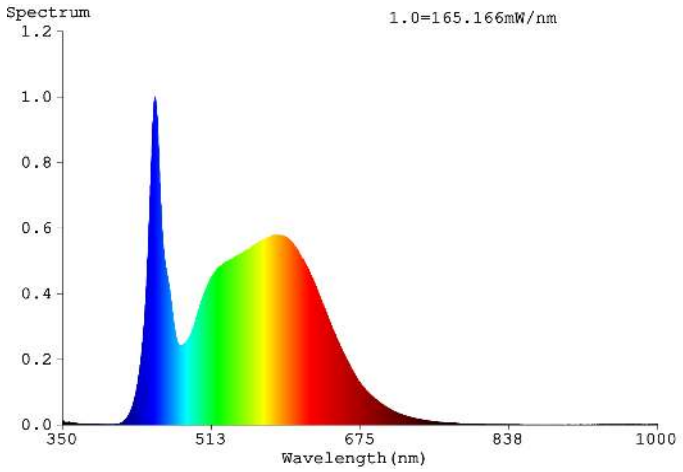

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

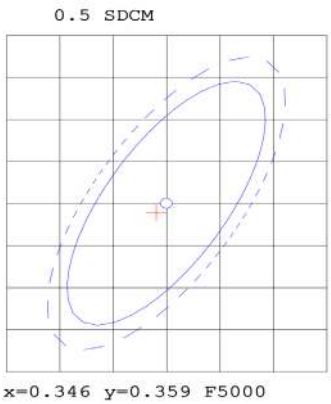

CERTIFICATIONS

Intertek

SPECIFICATIONS

Voltage	100-277V
Wattage	50W
Current	0.55/0.20A
Power Factor	0.9

LIGHTING PERFORMANCE

Lumens	5500
Equivalency	100W HID
Color Temperature (K)	4000K, 5000K, 6000K
Color Rendering Index (CRI)	90
Beam Angle	120°
Dimmable	0-10V
Efficiency (lm/w)	125
Frequency	60Hz

ENVIRONMENT

Operating Temperature	-4°F to 113°F
Suitable for Damp Locations Ingress	Yes

CONSTRUCTION

Housing	SPCC+PS Lens
Weight	8.15lbs

LIFESPAN

Average Life (Hours)	50,000+
Warranty	10 years