Cat6 Outdoor Shielded

23AWG • 4 Twisted Pairs • CMX
F/UTP • 550MHz • Solid Copper



Lengths Available

- 500ft
- 1000ft

Jacket Colors

Key Features

- Bandwidth tested up to 550 MHz
- Suitable for 1 Gigabit and 5 Gigabit Ethernet up to 328 ft
- In compliance with ANSI/TIA 568.2-D
- CMX jacket designed to withstand sunlight, dirt, snow, and moisture
- Supports Power over Ethernet: PoE/PoE+/ PoE++ (IEEE 802.3af/at/bt) 4PPoE up to 90W
- Sequential footage markings every 2ft

Technical Data

Insulation	PE
Average Thickness (mm)	0.275
Min Point Thickness (mm)	0.253
Conductor Insulation Dia. (±0.02mm)	**1.12**
Twisted Pair Dia. (±0.02mm)	2.24
Ripcord	Nylon
Spline	PE
Polyethylene Tape	Present
Shielding	F/UTP
Drain Wire - Solid Tinned Copper (mm)	0.40
Water Resistance	Jacket Only

Color of Pairs	
Pair 1	Blue- White/Blue
Pair 2	Orange- White/Orange
Pair 3	Green- White/Green
Pair 4	Brown- White/Brown

Cable Jacket	LLDPE
Average Thickness (mm)	0.55
Min. Point Thickness (mm)	0.50
Outer Diameter (±0.2mm)	**7.20**


Conductor	Solid Bare Copper
Size	23AWG
Conductor Dia. (±0.05mm)	0.57

Standards Reference

UL-444 / cETLus

ANSI/TIA 568-2.D

ISO/IEC 11801

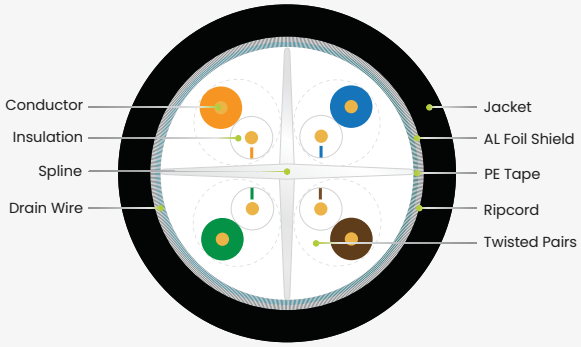

Print Legend

trueCABLE CAT6 CMX F/UTP OUTDOOR UV 75°C 4PR 23AWG c(ETL)us VERIFIED to ANSI/TIA 568-2.D 550MHz ROHS-3 XXXXFT MM/YY

Revision 2
04/01/2022
*Specs subject to change without notice. Current version availble at www.trueCABLE.com

RoHS

certified PURE COPPER

Intertek

Forever Warranty. Forever Covered.

Cat6 Outdoor Shielded

23AWG • 4 Twisted Pairs • CMX
F/UTP • 550MHz • Solid Copper



Lengths Available

- 500ft
- 1000ft

Jacket Colors

Electrical Characteristics

PoE Certification	PoE/PoE+/PoE++ 4PPoE
Maximum PoE Wattage	90W
PoE Application Compatibility	802.3af/at/bt Type 4
TIA 568-2.D Cat6 Permanent Link +PoE	CERTIFIED
Maximum Application Speed @ 295ft	5GBASE-T
Nominal Velocity of Propagation (NVP)	66.8
Maximum Operating Voltage	300V
1.0 - 550MHz Impedance (Ω)	100 ± 15
Maximum Operating Frequency	550MHz
1.0 - 550MHz Delay Skew (ns/100m)	≤45
Pair-to-Ground Capacitance Unbalance (pF/km)	≤3300
Max. Conductor DC Resistance 20°C (Ω/km)	68



Mechanical & Environmental Operating Parameters

Test Object	Jacket	**Aging Condition (°C x hrs)**	100 x 168
Test Material	LLDPE	**After Tensile Strength (Mpa)**	≥85% of unaged
Before- Tensile Strength (Mpa)	≥13.8	**Aging Condition - Elongation (%)**	≥50% of unaged
Aging- Elongation (%)	≥100	**Cold Bend(-20 ± 2°C x 4hrs)**	No Crack
Min. Bend Radius	5.0cm/2.00in	**Operating & Storage Temp.**	-40°C to 75°C | -40°F to 167°F
Max. Installation Tension	110N/25lb-ft	**Installation Temp.**	-20°C to 75°C | -4°F to 167°F

Tested Compatible Accessories

Product	Part Number
Cat6 Toolless Keystone Jack | Shielded	6ESTL90CMPT
Cat6/6A Pass Through RJ45 Connectors | Shielded	LGEGPTRJ45
Cat6A Field Term Plug | Shielded	6ASFT
Conductive Copper Fabric Strips	CUStrips_100pc
Large Slip-On RJ45 Strain Relief Boot | 8.00mm	LGSLIP

Revision 2
04/01/2022
*Specs subject to change without notice. Current version availble at www.trueCABLE.com

RoHS
certified PURE COPPER
Intertek
Forever Warranty. Forever Covered.

LINKWARE™ PC
CABLE TEST MANAGEMENT SOFTWARE

Cable ID: 6ESCMX UV STP JACK > STP RJ45 JACKET DATE 01/22

Test Summary: PASS

Test Limit: TIA Cat 6 MPTL (+PoE)
Limits Version: V7.6
Date / Time: 02/14/2022 11:39:40 AM
Operator: DON S
Headroom 2.2 dB (NEXT 3,6-4,5)
Cable Type: Cat 6 F/UTP
NVP: 66.8%

Main: Versiv
S/N: 1924100
Software Version: V6.7 Build 1
Calibration Date: 11/14/2020
Adapter: DSX-8000 (DSX-PLA804)
S/N: 4523169

Remote: Versiv
S/N: 1917273
Software Version: V6.7 Build 1
Calibration Date: 11/14/2020
Adapter: DSX-8000R (DSX-PC6)
S/N: 4716104

Length (ft), Limit 295	[Pair 4,5]	297
Prop. Delay (ns), Limit 498	[Pair 1,2]	484
Delay Skew (ns), Limit 44	[Pair 1,2]	32
Resistance (ohms), Limit 21.00	[Pair 1,2]	13.54
Resist. Unbal. (ohms)	[Pair 4,5]	0.081
Resist. P2P Unbal. (ohms)	[Pair 1,2-4,5]	0.205
Insertion Loss Margin (dB)	[Pair 1,2]	3.9
Frequency (MHz)	[Pair 1,2]	250.0
Limit (dB)	[Pair 1,2]	31.1

	Worst Case Margin		Worst Case Value	
PASS	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	3,6-4,5	3,6-4,5	3,6-4,5
NEXT (dB)	3.0	2.2	3.1	2.2
Freq. (MHz)	246.0	232.0	246.5	232.0
Limit (dB)	35.5	35.9	35.4	35.9
Worst Pair	3,6	4,5	3,6	4,5
PS NEXT (dB)	4.4	4.1	4.4	4.1
Freq. (MHz)	246.5	232.0	246.5	232.0
Limit (dB)	32.8	33.2	32.8	33.2


PASS	MAIN	SR	MAIN	SR
Worst Pair	4,5-1,2	4,5-1,2	4,5-1,2	4,5-1,2
ACR-F (dB)	18.2	18.5	18.4	18.5
Freq. (MHz)	240.5	245.5	246.5	245.5
Limit (dB)	16.6	16.4	16.4	16.4
Worst Pair	4,5	4,5	1,2	1,2
PS ACR-F (dB)	18.0	18.5	19.8	19.3
Freq. (MHz)	2.4	1.0	246.5	245.5
Limit (dB)	53.7	61.2	13.4	13.4


N/A	MAIN	SR	MAIN	SR
Worst Pair	3,6-4,5	3,6-4,5	3,6-4,5	3,6-4,5
ACR-N (dB)	6.5	7.4	8.8	7.6
Freq. (MHz)	7.1	24.1	246.5	232.0
Limit (dB)	55.5	43.1	4.6	6.1
Worst Pair	3,6	3,6	3,6	4,5
PS ACR-N (dB)	7.3	8.3	10.0	9.4
Freq. (MHz)	7.3	7.3	246.5	232.0
Limit (dB)	53.0	53.0	2.0	3.5


PASS	MAIN	SR	MAIN	SR
Worst Pair	1,2	1,2	4,5	4,5
RL (dB)	10.3	5.9	11.8	8.1
Freq. (MHz)	24.4	3.5	233.5	233.5
Limit (dB)	19.1	21.0	10.3	10.3


Compliant Network Standards:


10BASE-T	100BASE-TX	100BASE-T4
1000BASE-T	2.5GBASE-T	5GBASE-T
ATM-25	ATM-51	ATM-155
100VG-AnyLan	TR-4	TR-16 Active
TR-16 Passive		





























FLUKE networks