Instrutions for Use

VE07

Installation Tips


⚠ IMPORTANT

Refer to the 「step 1」 to learn the door is right handed or left handed.


Before tighten the interior assembly screws, test if it's able to move the thumb turn to lock/unlock. If not, please go back to 「step 2」 and reinstall.

If the direction of the slide swith is set incorrectly, it also can be changed in the DDLock App. (Settings＞Door opening direction)

STEP1

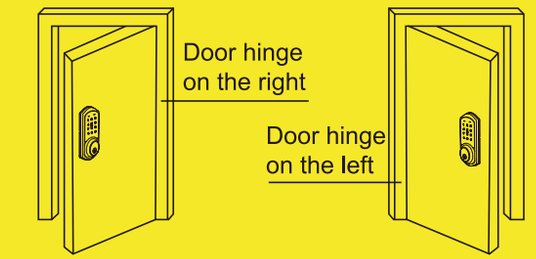

STEP2

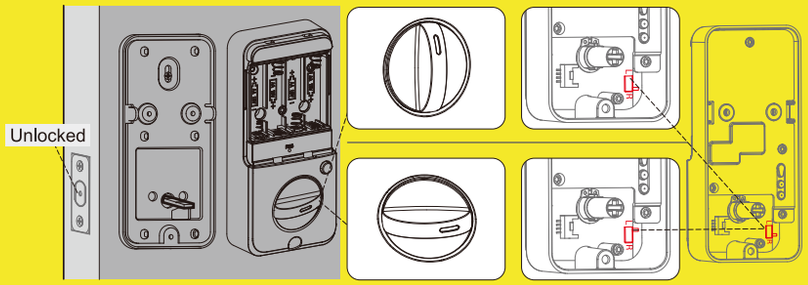

Right handed door

Turn the thumb turn to the Vertical position

Left handed door


Move the slide switch to “L”
Turn the thumb turn to the Horizontal position.

Move the slide switch to “R”

Instructions for doors with 1-1/2" (38mm) holes


1. Temporarily insert latch bolt.

If your latch bolt cannot be inserted all the way to the end, you need to extend the latch hole. Follow the instruction in Step 2. If the latch bolt sits properly, skip to Step 3.

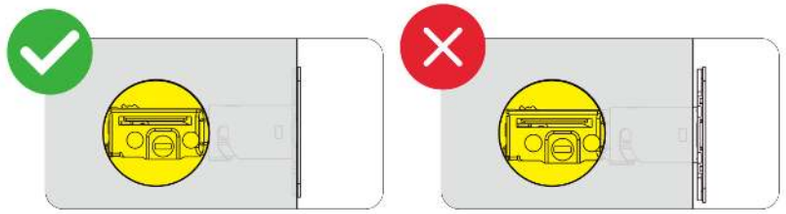


2. (OPTIONAL): If you do not need to extend the latch hole, go to Step 3.

For a 1-1/2" (38 mm) bore hole, use a 1" (25.4 mm) Drill Bit to extend the latch hole at least 13/64" (5 mm) deep. No need to extend the latch hole for a 2-1/8" (54 mm) bore hole.
After extending the latch hole, insert the Latch Bolt again to ensure it fits correctly.

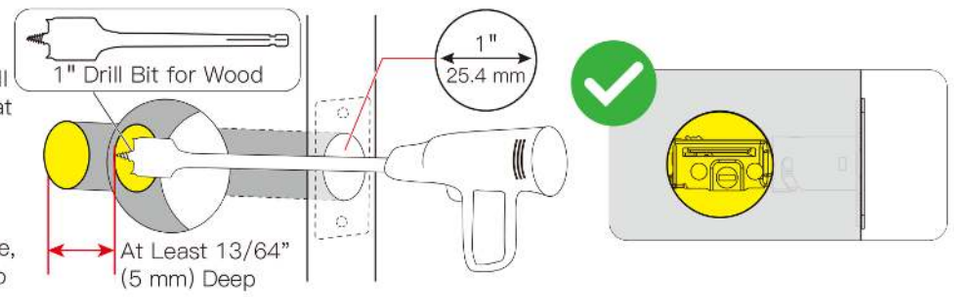

3. Test latch bolt operation.

Install the Latch Bolt and rotate it with a screwdriver to confirm smooth rotation.

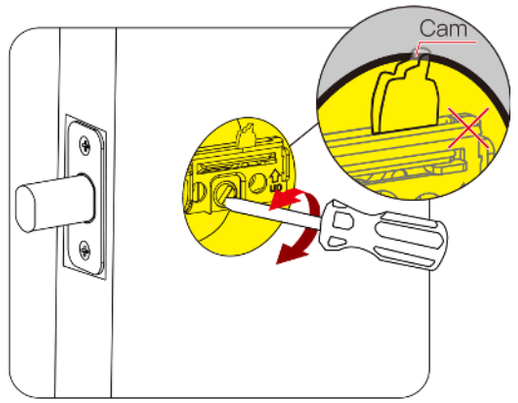

4. (OPTIONAL): If the latch bolt operation is smooth, skip to next step.

If it cannot rotate smoothly because the door hole is too small.
Remove the Latch Bolt and chisel out a small channel at the top of the hole to give the cam of the Latch Bolt room to rotate.

