Quick Start Guide

support@xtoolonline.com


D5S Smart Diagnostics System

Welcome to the XTOOL D5S Smart Diagnostic System Quick Guide. This guide will help you get started with your scan tool quickly and efficiently.

IMPORTANT: Based on the original diagnosis, the function of checking the vehicle battery voltage has been added, which can check the real-time voltage of the vehicle battery to avoid communication failure caused by low voltage.

Getting Started

- Press and hold the power button to turn on the tablet
- Select Wi-Fi and start the activation
- Input your E-mail address and set a login password, or log in with your existing account and click "Start to use" to complete the activation

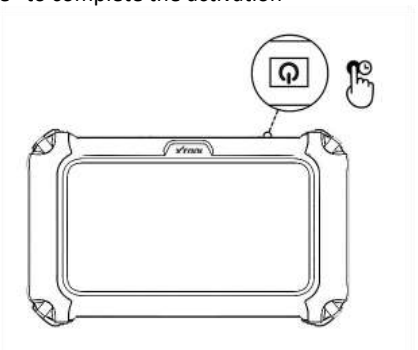


1

- Connect the main cable to the tablet and tighten the screws




2

3

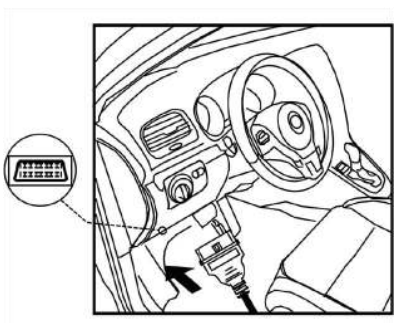

- Plug the main cable into the vehicle's DLC port

4

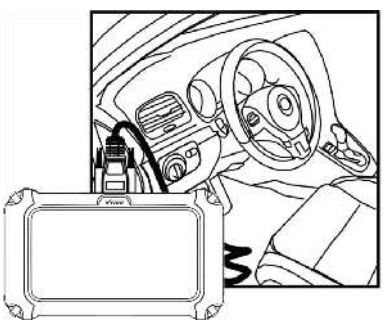

- Your tablet is now ready for diagnosis

General Introduction

- **Four-System Diagnostics:**

The automotive four-system diagnostic tool is used to check and diagnose key vehicle systems, including the engine, transmission, ABS (Anti-lock Braking System), and airbag system. It can read and clear fault codes, monitor real-time data, perform system tests, and calibrate systems, thereby improving the efficiency and accuracy of fault diagnosis.

IMPORTANT: After connecting the device, the vehicle system page may only display three systems for two reasons: many modern vehicles combine the transmission and engine into one system. Additionally, the vehicle may not be equipped with the relevant systems at all.

- **Supports 15 Special Functions**

In addition to basic diagnostic functions, D5S also has 15 commonly used special functions to meet more daily operation needs of auto mechanics.

Vehicle Fault Lights

- Whether the warning light can be turned off depends on the vehicle's fault codes. Some require repairs to clear the fault codes and turn off the light.

Internet Connection

IMPORTANT: Internet connection is necessary for device activation, software downloads, and completing certain maintenance functions. If you encounter issues connecting to Wi-Fi, follow these steps to troubleshoot:

- **Change Wi-Fi Network:** Try connecting to a different Wi-Fi network to determine if the issue persists.
- **Use Mobile Hotspot:**

(1) Share your smartphone's cellular data via hotspot.

(2) Activate your phone's hotspot and connect your tablet to it.

If device activation succeeds using cellular data but fails with your home Wi-Fi, please contact your internet dealer for further assistance.

Note: While basic diagnostic functions can be performed offline, certain advanced capabilities of the XTOOL D5S require an internet connection to access the latest information and functions.

How to Register and Activate

- **Wi-Fi Connection**
- **Enter Your Email Address and Set a Login Password or Log in with Your Existing Account**

- **Start to Use**

Click the "Start to use" button, and you can begin using your device.

Device Charging

IMPORTANT: Ensure the tablet is fully charged before use. It's recommended to charge the tablet with the original power supply for more than 6 hours before turning it on. Devices unused for extended periods may affect battery life; thus, charge at least once a month.

- **Charging:** Connect the USB port to the charging head and the Type-C port to the device, then charge the device for a minimum of 6 hours.
- **Check Battery Power:** Ensure the battery is fully charged and try turning on with the power supply.
- **Power Reset:** If the device remains unresponsive, perform a hard reset by pressing and holding the power button for 15 seconds and turn it on again.

Settings

- **Language:** Adjust language preferences.
- **Units:** Set measurement units (Metric/Imperial).
- **Device Information:** Check device version and update options.

Language Changes

IMPORTANT: The D5S intelligent diagnostic System supports 15 languages. The software is pre-installed on each device in English, after the language is changed, the software needs to be downloaded again.

The following are the detailed steps to change the language of the device.

(1) Contact Your Dealer: Provide your tablet's Serial Number (S/N) to your dealer and specify the desired language.

(2) Factory Data Reset: More> Settings> About>Factory Data Reset

(3) Log in Again with Your Registered Account.

(4) Remove English Diagnostic Software.

(5) Choose the Language You Preferred: More> Settings> Language> Choose The Language You Want

(6) Re-download the Software in the Language You Have Chose.

Software Updates

IMPORTANT: Ensure the tablet is connected to the Internet and has adequate memory. It's recommended to connect the tablet to a power source during updates to prevent automatic shutdown due to low battery. You can check available updates for car makes via the Update menu.

- Access the Update page to view all available updates. Follow these steps to download the software:

(1) Update All Software: Click the “Update” button to download all available updates.

(2) Individual Updates: Click download arrow on the right of each specific item to download that software.

- Once downloaded, software updates are automatically installed and will overwrite previous versions.
- If the download is forcibly interrupted for any reason, the program will keep the download progress until you try again.

Diagnostic Report Printing

IMPORTANT: For the safety of the device's firmware, please avoid connecting it directly to the printer.

Send the diagnostic report to your email address and you can view it at any time. Here are the steps to print the diagnostic report:

(1) Send Diagnostic Report to Your Email： More> Diagnostic Report> Choose the report you want to print> Share by email> Input your email address

(2) Receive Diagnostic Reports by Email and Save them on Your Phone or Your iPad.

(3) Connect Your Phone or Your iPad to the Printer and Print the Diagnostic Report.

Tips for Use

- Ensure the vehicle ignition is on before performing scans or operations.
- Follow on-screen prompts for each function to ensure proper operation.
- Before each use, connect the device to the stable Internet to check for the latest updates to the app, firmware, and software for optimal performance.
- Connecting the device to the internet at least every 30 days to ensure firmware updates, improve performance, and help locate it if stolen.

Contact US

After-sales Service:
support@xtoolonline.com

Official Website
https://www.xtoolonline.com

Address:
17&18/F, A2 Building, Creative City, Liuxian Avenue, Nanshan District, Shenzhen, China

Corporate & Business
business@xtoolonline.com
sales@xtoolonline.com