NEWTRY

Newtry, new start.

HYDRAULIC GEAR PULLER

Users' Guide



Please read the manual carefully before use

aftersaleservice2016@hotmail.com

✧ Brand Introduction

How we got our start?

Since established in 2016, NEWTRY has developed as a leading e-commerce brand. Based on our brand idea "NEWTRY, New Start", we have striven to build our market positioning. Choosing a new try, we have owned satisfying achievements. Choosing NEWTRY, customers have owned satisfying products & service.

What makes our product unique?

With product as our lifeline, we trained an excellent development team, committing to the research and development of new products and the reform of mature products. With service as our spirit, we trained professional and responsible after-sales service teams, ready to solve any problem at any time.

Why we love what we do?

NEWTRY

With more and more NEWTRY products used to improve one's work and life, from more and more top ratings written by one's excited hands, we know we have finished what we committed to do. Customers choose a new try on us, we giving back a new start on their lives. We are proud of what we do.

✧ Product Warranty

Secured return policy, please see details at store homepage

All products are warranty for ONE year after-sales service (customized and consumables excepted)

NEWTRY promises to offer a lifelong free technical support


✧ Feedback & Review

If you are satisfied with our product and customer service,

please kindly left a "5 star" positive store feedback and product review,

which is very important for us to do better.

1. Product Part Name

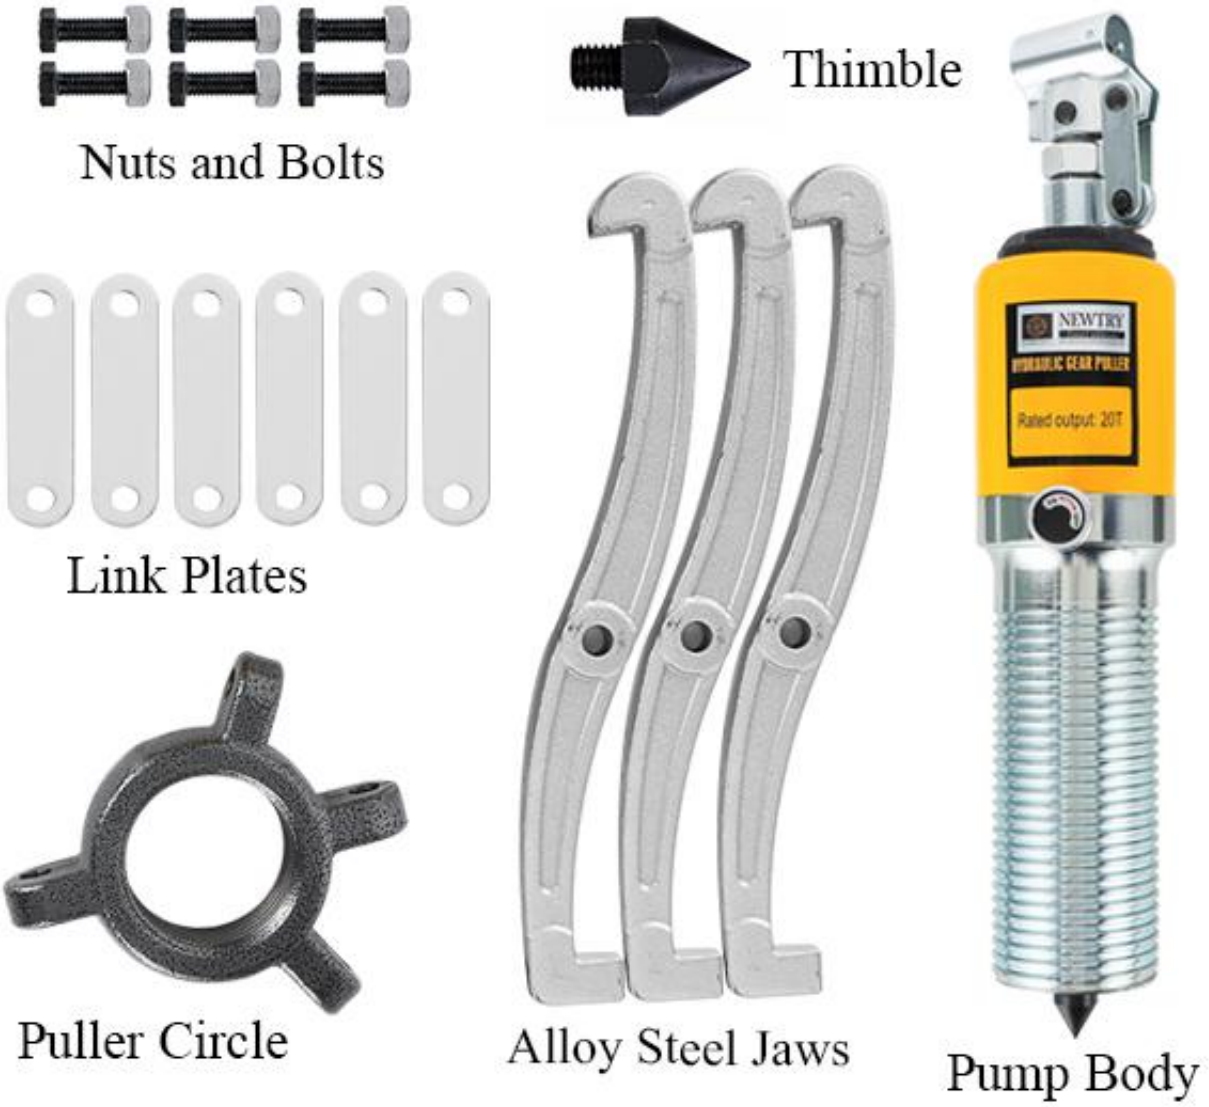



2. Improtante Parameter



Safety weight	5T	10T	15T	20T
Lateral maximum pull distance	7.9"	9.8"	11.8"	13.8"
Longitudinal maximum pull distance	5.5"	6.3"	7.08"	7.9"
Axial stroke	1.97"	1.97"	1.97"	1.97"
Apex degree	22	23	24	24
Thread diamete	1.8"	2.36"	2.36"	2.9"
Diameter	2.36"	2.95"	2.95"	3.5"
Weight	14.3lbs	23lbs	26.46lbs	35lbs
Jaw length	9.4"	11.8"	11.8"	11.8"
Handle length	15.35"	15.35"	15.35"	15.35"
Total length	14.2"	14.76"	14.76"	15.7"

3. Precautions

(1) Put the slotted end of the handle into the oil return valve stem first, and tighten the oil return valve stem in a clockwise direction.

(2) The effective distance of the piston starting rod of the hydraulic puller is only 50mm, so the extension distance should not be greater than 50mm during use.

(3) If you want to retract the piston starting rod, you only need to use the grooved end of the handle to slightly loosen the oil return valve rod in a counterclockwise direction, and the piston starting rod will gradually retract under the action of the spring.

(4) Before use, the hydraulic puller of the corresponding tonnage should be selected according to the outer diameter of the object to be pulled, saw and load force, and avoid damage caused by overloading.

NEWTRY

(5) The hydraulic puller uses (GB443-84) N15 mechanical oil at - 5-45℃ and (GB442-64) synthetic spindle oil at - 20 ~5℃.

(6) In order to prevent damage to the equipment caused by overload, the hydraulic device is equipped with an overload automatic unloading valve. When the pulled object exceeds the rated load, the overload valve will automatically unload, and a larger tonnage hydraulic puller is used instead.

(7) As the new or long-term used hydraulic puller has more air in the cylinder, please move the handle first without load 2-3 times to eliminate air.

4. RANGE OF APPLICATION

This hydraulic gear puller is convenient , labor-saving, compact , flexible , light weight and portable and has a wide range of applications, suitable for Railway vehicle maintenance, Mechanical installation, Mine maintenance, Construction engineering support etc. It can also disassemble round workpieces such as pulleys, gears and bearings in various mechanical equipment.

Products related to this item

Model	10T Ultra-thin hydraulic jack	20T Ultra-thin hydraulic jack	CP-800
Product			
ASIN	B074R91NW4	B074R8J2VM	B06Y1HKMVC
Used With	CP-180 Hydraulic Pump	CP-180 Hydraulic Pump	Large oil storage
Model	30T Multi-Section hydraulic jack	50T Ultra-thin hydraulic jack	100T Multi-Section hydraulic jack
Product			
ASIN	B07Y22TP4Z	B074RDBXLC	B07Y21FXZR
Used With	CP-700 Hydraulic Pump	CP-700 Hydraulic Pump	CP-700 Hydraulic Pump

You can contact us if you have any questions

Email: aftersaleservice2016@hotmail.com

Facebook: NEWTRY

WhatsApp: +86 13758176394

Wechat: NEWTRY2016