
1X4 SELECTABLE CEILING PANEL

Easily replace outdated tubes and fixtures with this dimmable, lightweight 1x4 LED Panel. Optimize focus and productivity in your space by adjusting the brightness (30W, 40W, 46W) and selecting the best color temperature (3500K, 4000K, 5000K) to suit your needs.

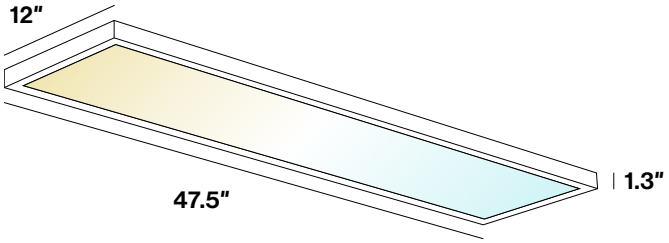


MODELS


PN14_SW-WH-3550K-#PK
PN14_SW-BK-3550K-#PK

LIGHT DISTRIBUTION ANGLE

LUMINOUS INTENSITY DISTRIBUTION

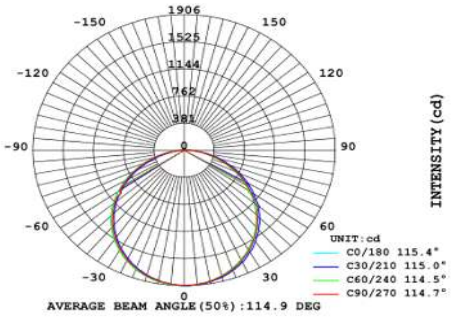

LUMINOUS INTENSITY DISTRIBUTION

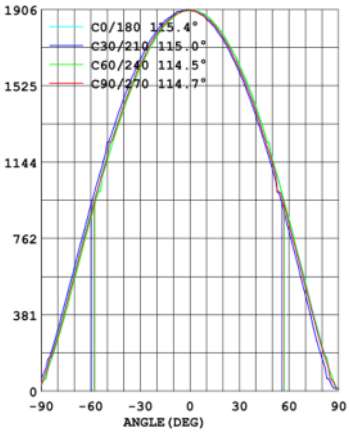

NOTE: The curves indicate the illuminated area and the average illumination at different distances.

CERTIFICATIONS

SPECIFICATIONS

Voltage	**120VAC**
Selectable Wattage	**30W/40W/46W**
Power Factor	**>0.9**

LIGHTING PERFORMANCE

Lumens	**Maximum 5700LM**
Selectable Color Temperature	**3500K/4000K/5000K**
Color Rendering Index	**80**
Beam Angle	**120°**
Dimmable	**Yes**
Efficacy	**125 lm/w**
Frequency	**60Hz**

ENVIRONMENT

Operating Temperature	**-4°F to 122°F**
Moisture Rating	**Damp Rated**

CONSTRUCTION

Housing Material	**Aluminum+Galvanized Iron Plate**
Weight	**5.5 lbs**

LIFETIME

Average Lifetime	**50,000 hrs**
Switching Time	**100,000**
Warranty	**7 Years**