Foxwell
Shenzhen Foxwell Technology Co., Ltd.

QUICK START GUIDE For Diagnostic Tablet


Vehicle Connection

NOTE: Different scanner models have different vehicle connection methods.




Tablet with VCI Fox Link I: Wireless Bluetooth Connection

1. Locate the data link connector (DLC) under the dash on the driver side of the vehicle.
2. Plug the VCI to the vehicle DLC directly.
3. Switch the ignition key to the ON position.
4. Boot up the scanner, launch the diagnostic APP and make Bluetooth pairing of the VCI dongle and tablet.
5. Check if the connection indicator turns to green. If yes, it means the scanner is ready to start diagnosis.

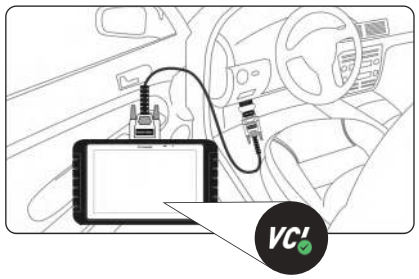


Tablet with cable

1. Locate the data link connector (DLC) under the dash on the driver side of the vehicle.
2. Connect the diagnostic cable to the scanner and plug it to the vehicle DLC with a correct adapter.
3. Switch the ignition key to the ON position.
4. Boot up the scanner and launch the diagnostic APP.
5. Check if the connection indicator turns to green. If yes, it means the scanner is ready to start diagnosis.

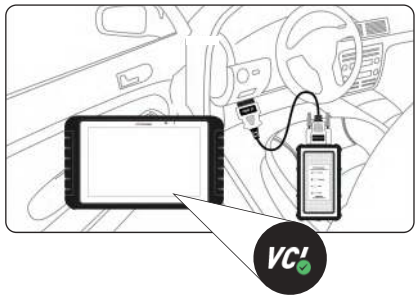

Tablet with VCI dongle : Bluetooth Connection

1. Locate the data link connector (DLC) under the dash on the driver side of the vehicle.
2. Connect the diagnostic cable to the VCI dongle and plug it to the vehicle DLC with a correct adapter.
3. Switch the ignition key to the ON position.
4. Boot up the scanner, launch the diagnostic APP and make Bluetooth pairing of the VCI dongle and tablet.
5. Check if the connection indicator turns to green. If yes, it means the scanner is ready to start diagnosis.

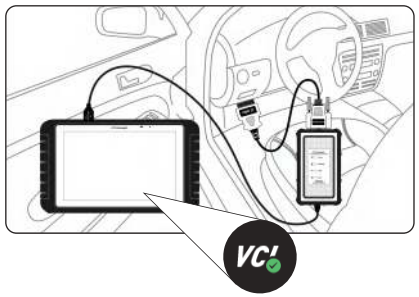


Tablet with VCI dongle: USB Connection

1. Locate the data link connector (DLC) under the dash on the driver side of the vehicle.
2. Connect the diagnostic cable to the VCI dongle and plug it to the vehicle DLC with a correct adapter.
3. Switch the ignition key to the ON position.
4. Connect the VCI dongle to the tablet with the USB Type-B cable.
5. Boot up the tablet and launch the diagnostic APP.
6. Check if the connection indicator turns to green.


Registration

NOTE

Please make sure your network works correctly and the tablet is fully charged or connect to external power supply.

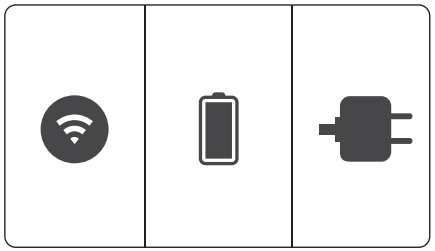


1 Press **Update** from home screen of diagnostic APP, and then press **Free Registration** to start.

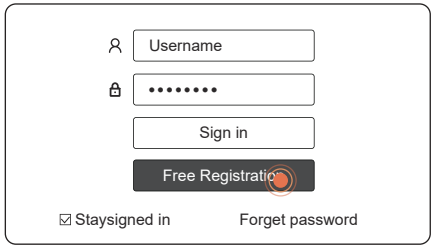

2 Enter one of your emails and tap **Send Code** to get a 4-digit security code. Input the code, create a password and click **Free Registration** to complete.




3 The serial number will be recognized automatically and click **Submit** to activate the scanner.

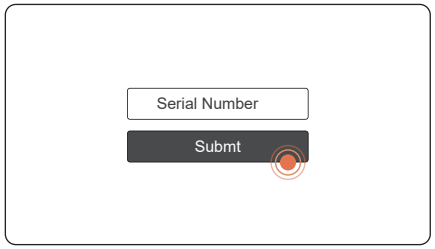

Update

1 Press **Update** from home screen of diagnostic APP or press update shortcut at the tool bar.

2 The available updates display. Click the check box(s) in front of the software you wish to update and then click the **Update** button to download.

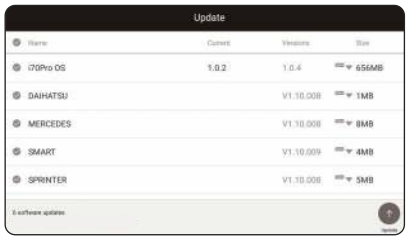

Pictures illustrated here are for reference only and this Quick Start Guide is subject to change without prior notice. For more detailed operations, please refer to the User's Manual.

Foxwell
Shenzhen Foxwell Technology Co., Ltd.

QUICK START GUIDE

For Diagnostic Tablet

Diagnostic Operations

- Before start diagnosis, please make sure:
  1. The ignition switch is turned to ON position.
  2. The engine is off.
  3. The vehicle battery voltage is between 10-14 volts.
  4. The scanner is correctly connected to the vehicle.
- Don't connect or disconnect the equipments while the ignition is on or the engine is running.

1. Establish communication with the vehicle either via Bluetooth/USB or cable connection.
2. Identity the vehicle either by VIN reading or manually entry.
3. Find the control modules installed in the vehicle either by Quick Scan or manual selection.
4. Start the tests and make records of test data when necessary.

Powering up the Scanner


Before using the diagnostic APP of the scanner (including updating the scanner), please make sure to provide power to the scanner. In case of low battery volume, please charge it with the power cable.

The unit operates on any of the following sources:


Internal Battery Pack



Vehicle Power



External Power Supply



Data Logging

Data Logging collects the communication data between the scanner and the vehicle under test to help with troubleshooting of diagnostic failures.



1. When connected to a car, click the Data Logging icon to start to create a debug data log.




2. Click the icon again to stop the recording and the data log record will be saved automatically.



3. Go to Data Manager -- Data Record to view the stored debug logs.

Remote Control

Whenever you need to get remote support from Foxwell,



1. Click the Remote Control icon at the home screen to start TeamViewer.



2. Press QuickSupport icon and the TeamViewer ID will show.



3. Send your ID to us to let our team to take control your tablet.

Contact Us

For service and support, please contact us.

WebSite : www.foxwelltech.us
E-mail : support@foxwelltech.com
Service Number : + 86 - 755 - 26697229
Fax : + 86 - 755 - 26897226

REGISTER YOUR PRODUCT AT
http://www.foxwelltech.us/register.html

Pictures illustrated here are for reference only and this Quick Start Guide is subject to change without prior notice. For more detailed operations, please refer to the User's Manual.