
Sunco

2x2 Dual Selectable Panel


Use the slider switch on the back of the ceiling panel to select your preferred color temperature (4000K, 5000K, 6000K) during installation. Dust-proof and dimmable (0-10V), this fixture is suitable for recessed or suspended installation in standard 2x2 drop ceilings.

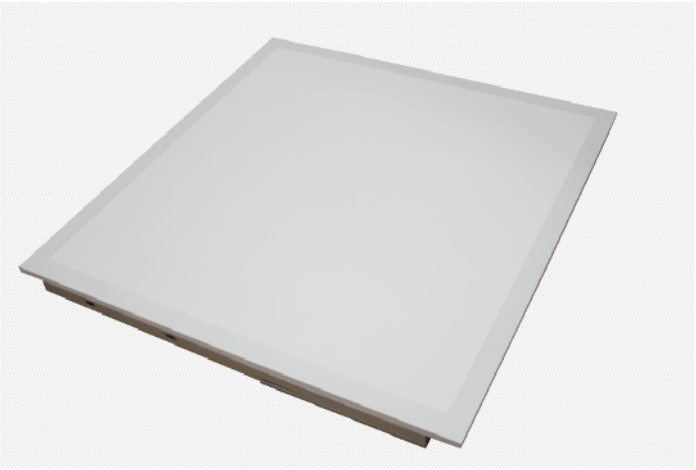

MODELS

PN_SM2x2-40W-0K

Illuminance Cone Diagram

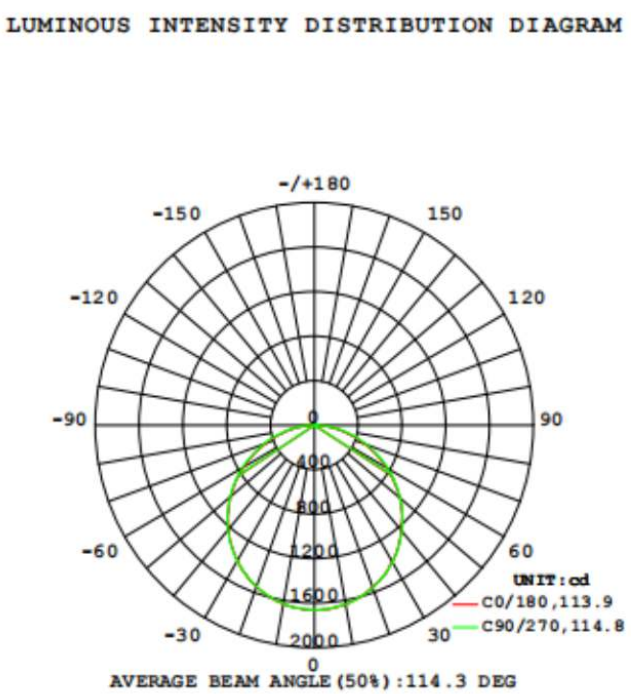

CERTIFICATIONS

SPECIFICATIONS

Voltage	**120-277**
Wattage	**20-30-40W select**
Power Factor	**⩾0.9**

LIGHTING PERFORMANCE

Lumens	**2200-3300-4400 lm**
Color Rendering Index	**80+**
Dimmable	**Yes(0-10V)**
Efficacy	**110 lm/w**
Selectable CCT	**40-50-60K select**
Beam Angle	**120°**

ENVIRONMENT

Operating Temperature	**-4°F - 113°F**
Moisture Rating	**Damp Rated**

CONSTRUCTION

Lens Material	**PS (Polystyrene)**
Weight	**4.1 lbs**

LIFETIME

Lifetime	**50,000 hrs**
Warranty	**7 year**