VocoPro
ULTIMATE CHOICE OF KARAOKE ENTERTAINMENT

Quick Setup Guide

DA-1000Pro

Professional Digital Karaoke Mixer

This quick reference guide is provided to help you set up your new DA-1000 Pro for the first time. It covers connectivity instructions for components shipped with the system only. When completed, you will have a fullfunction working digital karaoke system. If you have pre-existing gear that will require installation, refer to it's appropriate manual for detailed instructions.


STEP: 1


3 Things to Remember

1. Do **NOT** connect AC power cords until all of the connections are completed.

2. Be sure to make connections firmly.

3. If your Karaoke system doesn't match any of the example diagrams provided, see your VocoPro dealer or a qualified technician.

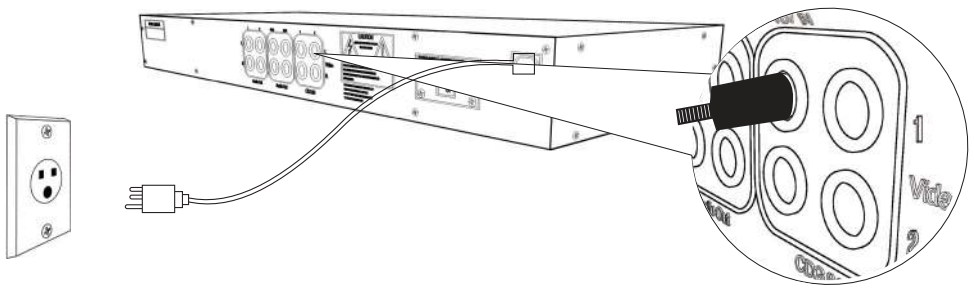

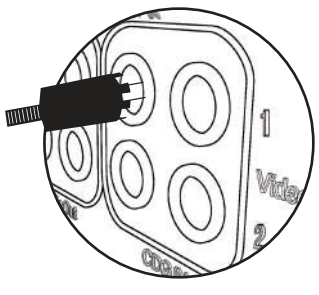


Loose connections may cause sound distortions.

STEP: 2

Preparations

4. Unpack contents from the box. You should have the following parts:


DA-1000 Pro

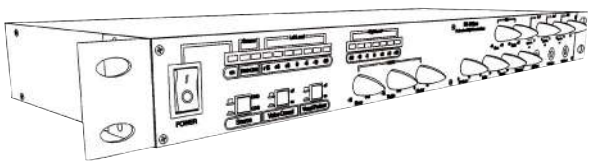

7 Mounting Bracket Screws



2 Mounting Brackets

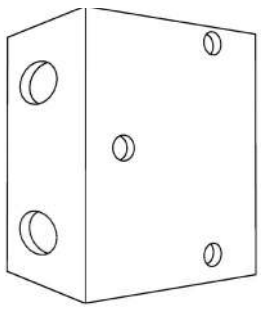

Instructional Manual




5. Decide whether or not the unit is going to be mounted to a rack case or not.
If not mounting to a rack case, skip Step 3 & 4


STEP: 3

Connecting Mounting Brackets

6. Each mounting bracket takes 3 mounting screws. Connect bracket's one at a time, being sure not to strip the screws provided. When both brackets are mounted, you are ready to mount the unit to your rack case.

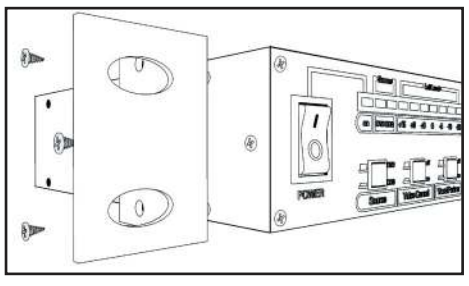


We include 7 screws, one being a spare

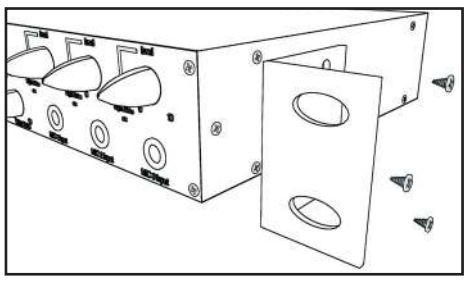


STEP: 4

Rack Mounting

7. Slide the DA-1000 Pro into the desired space on rack case, **Rear panel side in first.**

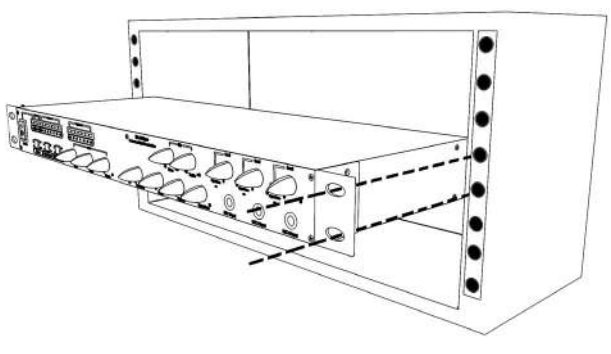

8. When supporting in position, use screws and mount case as instructed by it's manual as models of cases may differ.

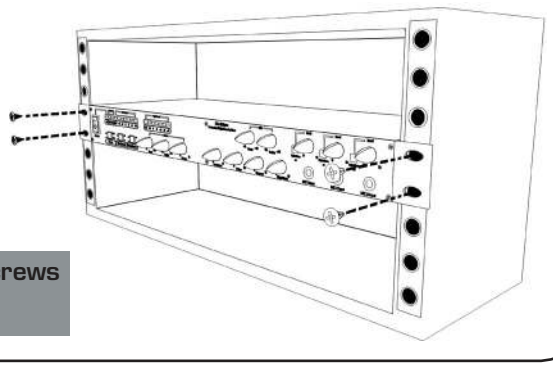


Rack case mounting screws are not included


STEP: 5

Connecting A/V Device(s)

9. Make sure or if necessary turn power off to all equipment before starting.

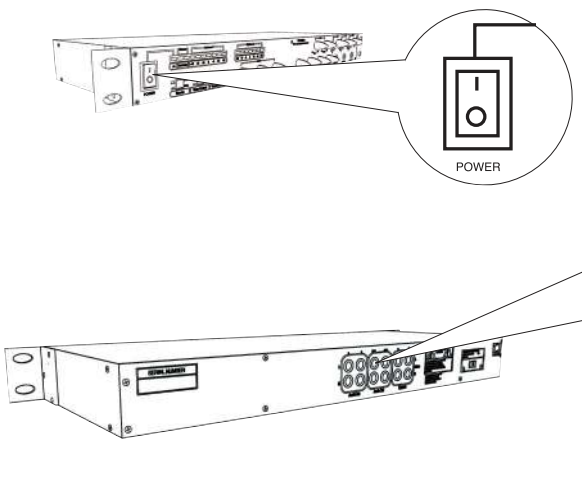

10. Connect RCA cables from Video output jacks on A/V device 1 to Video input jacks labeled CD+G on the DA-1000 Pro.

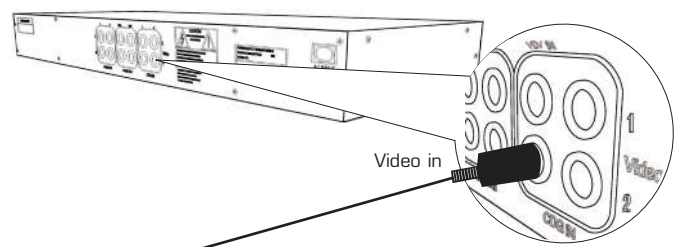

11. Connect RCA cables from audio output jacks on A/V device 1 to audio input jacks labeled CD+G on the DA-1000 Pro.


12. Repeat steps for A/V device 2, using the A/V input jacks labeled DVD on the DA-1000 Pro

STEP: 6

Connect Power Amplifier(s) or Other Device(s)

13. Connect RCA cables from audio input jacks on an amplifier or other device to the audio output jacks (1) on the DA-1000 Pro.

14. (Repeat steps for a second amplifier or other device, using the audio output jacks (2) on the DA-1000 Pro).

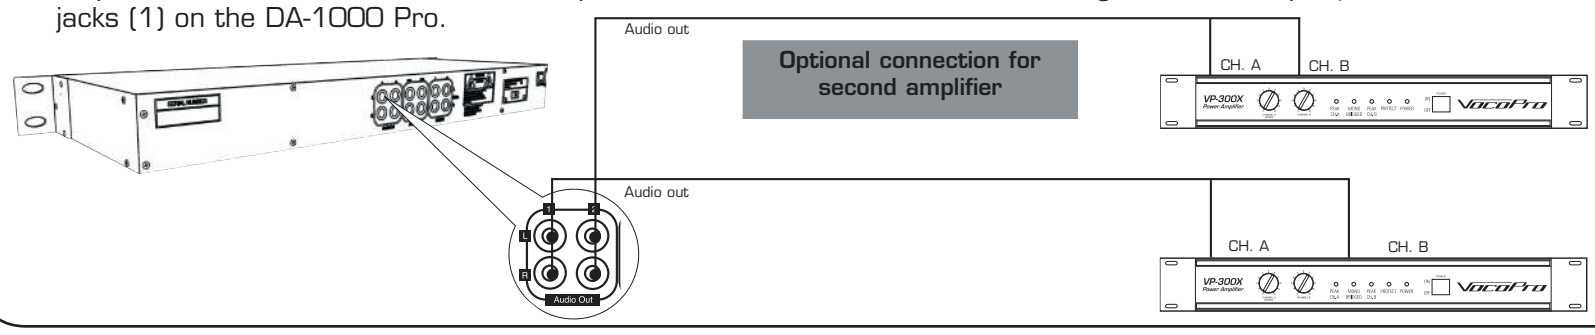


STEP: 7

Connect Monitor(s)

15. Connect RCA cable video input jack on monitor device 1 to video output jack (1) on the DA-1000 Pro.


16.(Repeat steps for a second monitor device, using the video output jack (2) on the DA-1000 Pro)

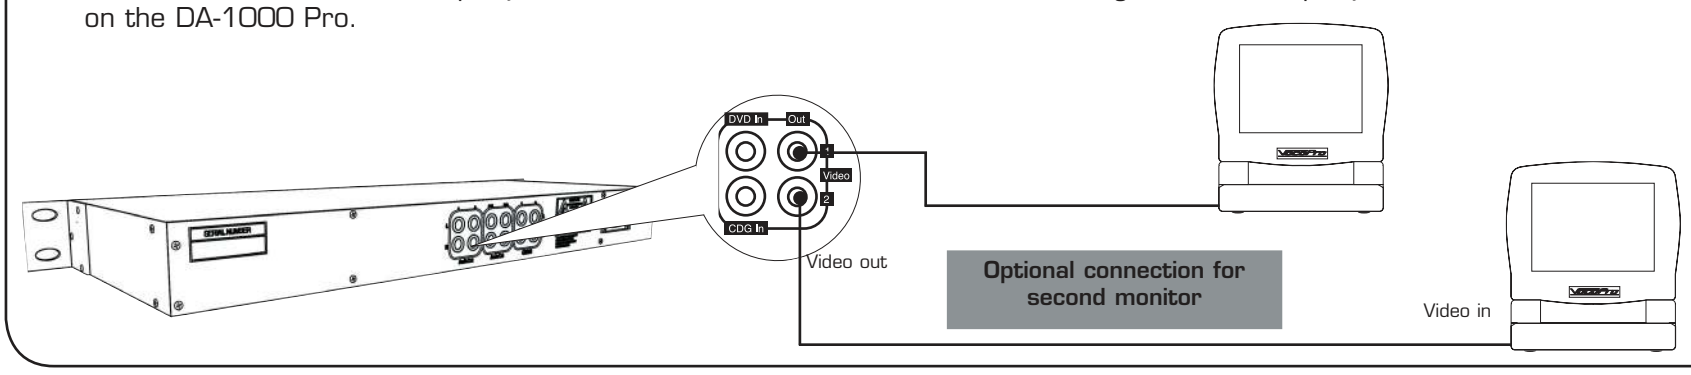

STEP: 8

Performing a Sound Check

17. Make sure master music and microphone volume levels are not over 50%. (This applies to the source and amplifier levels as well).

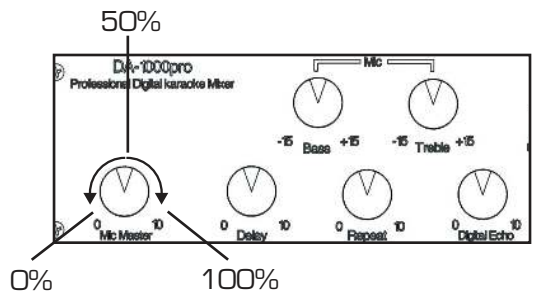

18. Plug microphone(s) to desired channels.

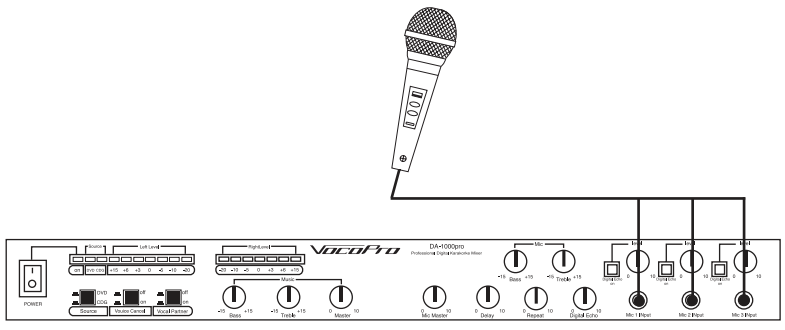


Figure 1 shows button pushed down for CDG player
Figure 2 shows button poped up for DVD palyer

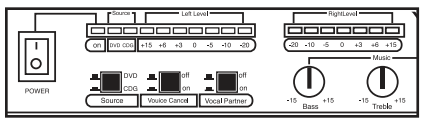


FIG. 1




FIG. 2



19. Set SOURCE button to the player you want as the current music source.

20. Play music from source and balance microphone and music levels to your choice.

YOU ARE NOW READY TO PERFORM LIKE A PRO!