User Manual(WIFI Smart Switch)



Please read the instructions carefully before installation. The manufacturers will not be responsible for any failure operations not follow the instructions.


Special attentions:

1- Don’t install with power.


2- Strictly in accordance with the product wiring diagram.

3- Don’t work over load.

I. Installation Steps:

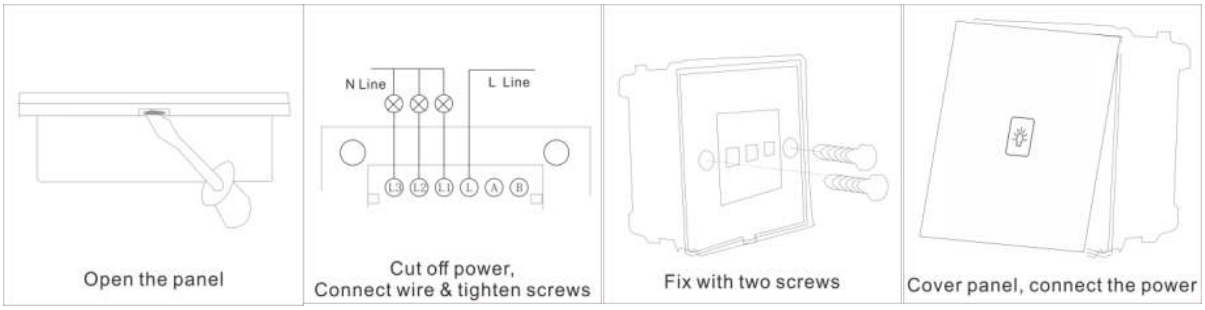

II. Wiring Diagram：

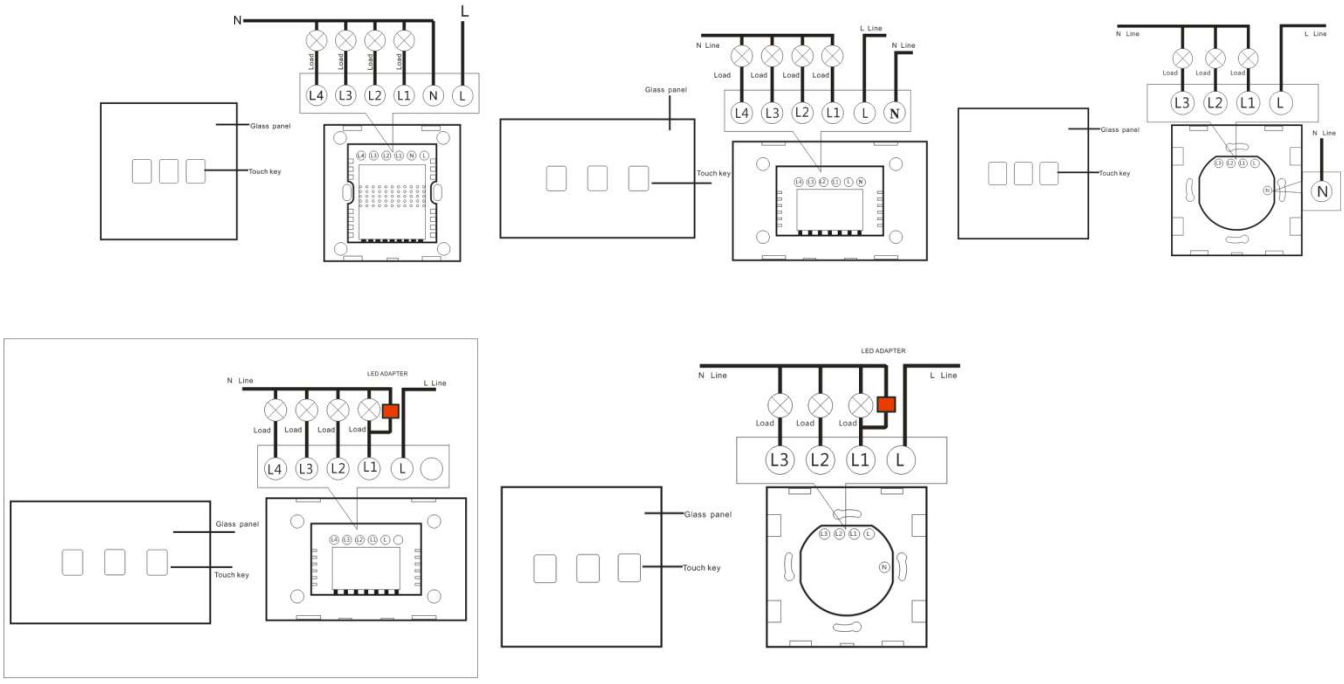


III. Program APP to control the WIFI Switch:

1- Scan the QR code, download the APP.


2- Pairing：

（1）Press the touch button and hold for about 7 seconds until the WiFi LED blinks fast.

（2）Click the '+' buttonon APP. Click next step, then'Wi-Fi network' then enter the router password;

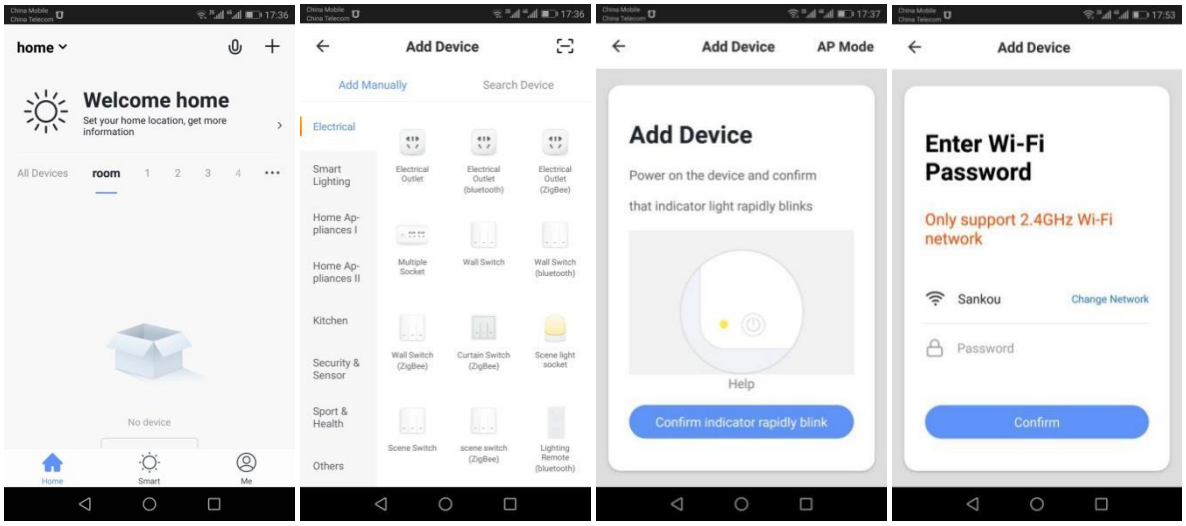


3- State show and setting scheduled

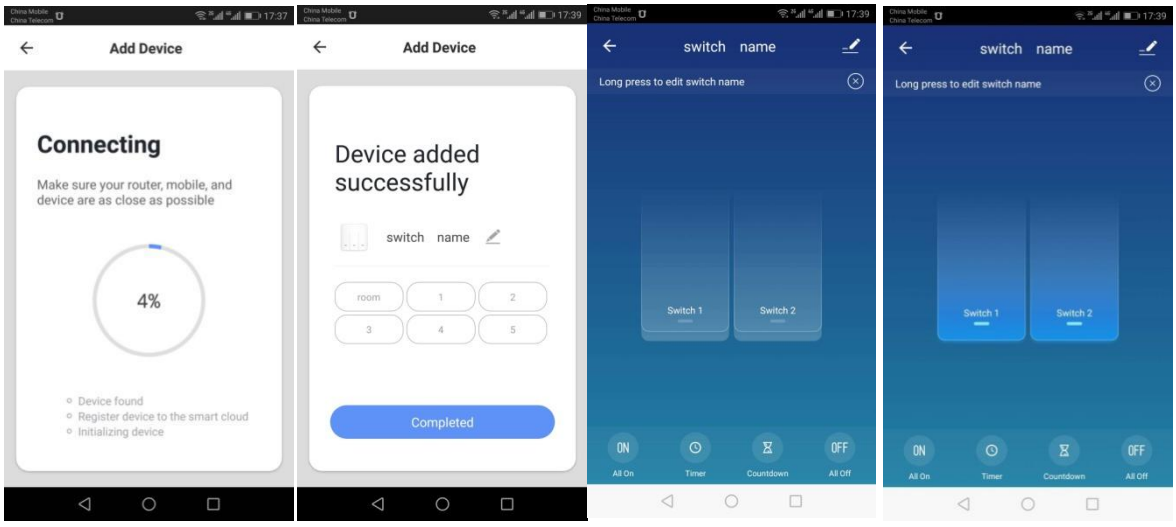

Connect successful State: show one switch on switch settings

4- Equipment management: Click the '+' buttonon APP, equipment delete or setting.

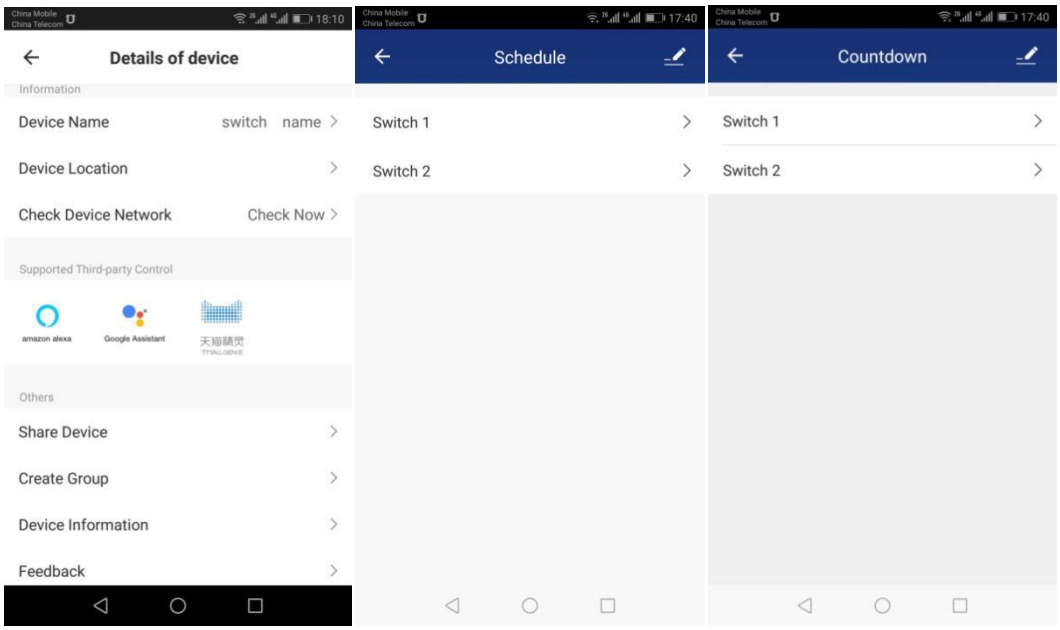

5- APP Display Description:

(1) Blue back light: The device is ON.

(2) Gray back light: The device is OFF.



Working state Off state

6- Questions: My device on the app stays "Off line"?

Answer: The new added device needs 1min to connect to WiFi and the Internet. If it stays off line for a long time, please judge the problem by the WiFi LED status:

WiFi LED quickly blinks one time every second, device failed to connect to your WiFi:

(1) Maybe you have entered wrong WiFi password.

(2) Device is too far away from your WiFi. Please take it closer.

(3) Device can not be added to the 5G-wifi-router, only the 2.4G-wifi is ok.

(4) Make sure your router is MAC-open.

If still failed, try to open a mobile hot spot and add again.

WiFi LED quickly blinks twice every second: Device has connected to WiFi but failed to connect to server. Please check your network connectivity.

lll. **How to pair the remote of the on/off only 1way remote switch**

1- Press the touch button and hold until you hear one 'Beep'

2- Press the remote key that you want to pair and you will hear another 'beep'

3- Press the touch buttonthree times, each time will lead to a 'Beep'.

Note: For multi gang switches, each button on the switch needs to be paired by repeating the above steps.

IV. **How to clear the setting.**

1- Press the touch button and hold, until you hear continuous four 'Beep', done!

Note: Please note that for multi gang switches only needs once clearing.

VIII. Specification:

1- Rated Voltage:AC110V/AC220V

2- Rated Frequency：50HZ/60HZ

3- Self Power Consuming：≤0.1mA

4- Rated Power：

Neutral & Live Line series: 1-2000w

Single Live Line low power series: 5-200W/gang

Single Live Line high power series: 5-2000W

5- UK series Dimension：86mm*86mm*33mm.

US series Dimension：118mm*72mm*34mm.

EU series Dimension：86mm*86mm*35mm. 80mm*80mm*35mm.