Powersports - AGM

XT9B-BS



Technical Specifications

Nominal Voltage	12V
Nominal Capacity	8Ah 10hr Rate 115 CCA
Chemistry	Lead Acid -AGM

Physical Specifications

Length	150mm	5.91in
Width	70 mm	2.76in
Height	105mm	4.13in
Height w/Terminal	105mm	4.13in
Weight (with Acid)	2.78Kg	6.13lbs
Case Material	ABS	

Charging Specifications

Charge Voltage	Battery	Per Cell
Float	13.5V~13.8V	2.25V~2.30V
Cycle	14.4V~15.0V	2.40V~2.50V

Capacity Specifications

Capacity Affected by Temperature	106% 40°C (104°F) 100% 25°C (77°F) 86% 0°C (32°F) 65% -15°C (5°F)

Temperature Specifications


Operating Temperature Capability	-40° F (-40° C) to 140° F (60° C)


Recommended parameters for optimal battery life and performance:

Charging: 32° F to 104° F (0° C to 50° C), Discharging: 5° F to 122° F (-15° to 50° C),
Storage: 50° to 77° F (10° C to 25° C)

FEATURES:

- Sealed, Non-Spillable AGM Battery
- VRLA Technology to Eliminate Spills
- Fresh Pack, Maintenance-Free
- Powerful Cold Cranking Amps (CCA)
- Advanced sulfate-resistant technology
- Maximum installation tile angle is 25°
- Rest after filling acid
- Charge battery for 3-6 hours with 1.5amp charger (Only use a 12V charger with a 12V battery, and a 6V charger with a 6V battery)

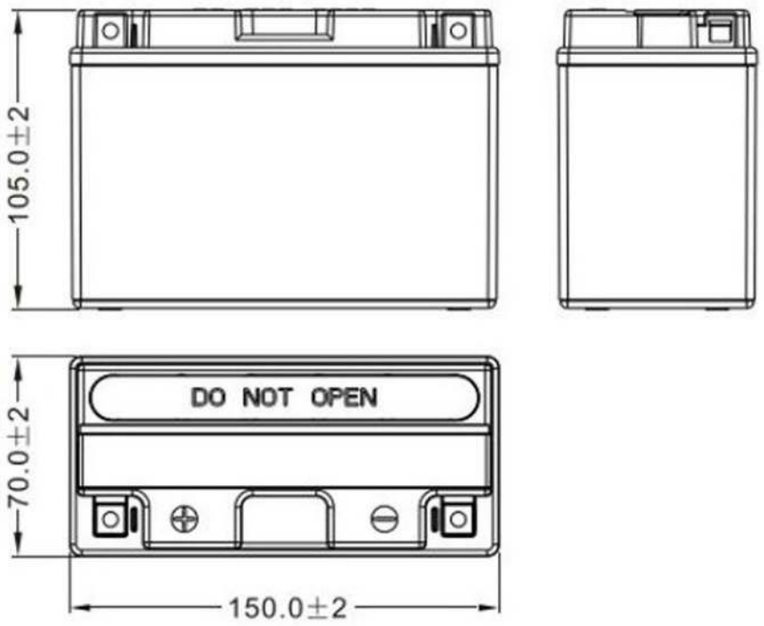

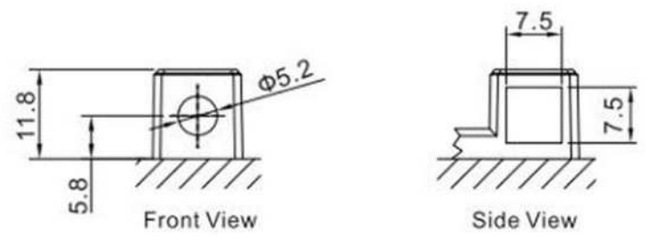

LEAD RETURN RECYCLE Pb

NOT RESTRICTED FOR ANY TRANSPORT
IATA/ICAO SPECIAL PROVISION A67
49 CFR 173.159(d)

Interstate Batteries
amazon@IBSA.com

INTERSTATE BATTERIES XT9B-BS

(ATV)

MAKE	CC	MODEL	YEAR(S)
Yamaha	700	Raptor 700, R, R SE	2006 - 2018
Yamaha	700	Raptor 700, R, R SE	2006 - 2020
Yamaha	700	Raptor 700, R, R SE	2006 - 2021

(MOTORCYCLE)

MAKE	CC	MODEL	YEAR(S)
Yamaha	600	R6S	2006 - 2009
Yamaha	600	YZF-R6	2001 - 2005
Yamaha	600	YZF-R6, R6S	2001 - 2009
Yamaha	750	YZF-R7	1999

(SCOOTER)

MAKE	CC	MODEL	YEAR(S)
Yamaha	400	YP400 Majesty	2004 - 2014