V5 User Manual

Download on the App Store

Google play

cloud.friggatech.com

Temperature & Humidity Data Logger




www.friggatech.com

Appearance Description



Display Description

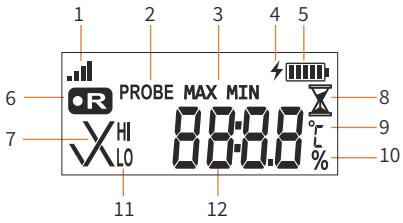


1. Signal Icon
2. Probe Mark(*)
3. MAX & MIN
4. Charging Icon
5. Battery Icon
6. Recording Icon
7. Alarm Status
8. Start-up Delay
9. Temperature Unit
10. Humidity Unit(*)
11. Alarm Type
12. Temperature Value

(*) Some models of V5 series support the fuction, please consult sales.

1. Check For New Logger

V5 series

Short press the red "STOP" button, and the screen will display the word "SLEEP", indicating that the logger is currently in sleep state (new logger, not used).

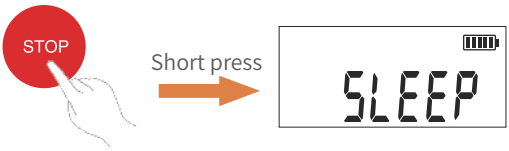

Please confirm battery power, if it is too low, please charge the logger first.

2. Turn On The Logger

Long press the green "START" button for more than 5 seconds.

When the screen starts flashing the word "START", please release the button and turn on the logger.




3. Start-up Delay

After the logger is turned on, it enters the start-up delay phase.

At this time, the icon "OR" is displayed on the left side of the screen, indicating that the logger has been turned on.


The icon "⧗" is displayed on the right side, indicating that the logger is in the start-up delay phase.

Delay start for 30 minutes.



4. Recording Information

After entering the recording state, the "⧗" icon will no longer be displayed, and the alarm status will be displayed in the lower left corner of the screen.



"√" the temperature is normal.

"X" the threshold has been exceeded.

5. Stop The Device

1. Long press "STOP" button for 5 seconds to stop.

2. Remote stop by pressing "End journey"on frigga cloud platform.


3. Stop by connecting the USB port.

Note:

1. Don't charge single-use data logger after activation, or it will stop recording immediately.


2. If the battery icon shows less than 4 bars before activation, charge the battery up to 100% before putting into use.

3. In order to prevent false triggering, the function of stop button is disabled by default, which can be enabled on the Frigga cloud platform;



6. View Final Information

After stopping, short press the "STATUS" button to view the local time of the device, the MAX and the MIN temperature data just recorded.

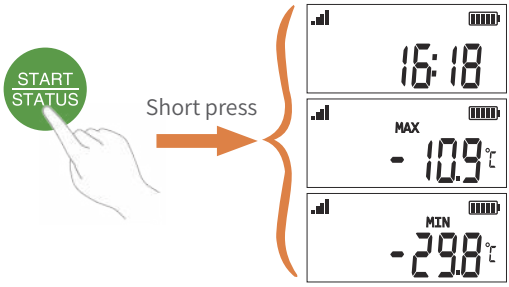

7. Get PDF Report

Connect to the computer and get PDF report via the USB port at the bottom of the logger.



PDF data report can also be obtained anytime, anywhere on Frigga cloud platform.



8. Charging

The battery of the V5 can be charged by connecting the USB port. There are 5 bars in the "▮" icon, each bar represents 20% of battery capacity, when the battery is less than 20%, there will be only one bar in the icon as a low battery reminder.When charging, the charging icon "ϟ" will be displayed.

