PRO1 IAQ

TRUE COMFORT IIII

This manual covers the following models:
- **T701**

Congratulations on purchasing a new thermostat. This thermostat was designed to the highest reliability and ease of use standards. Thank you for choosing Pro1.

Caution:
Equipment damage hazard
Do not operate the cooling system if the outdoor temperature is below 50˚ F (10˚ C) to prevent possible compressor damage.

Table of Contents	Page
Thermostat Quick Reference	2
Thermostat Operation	3
Contact Us	4
Warranty Registration	4

Need Help?


For assistance with this product please visit http://www.pro1iaq.com or call Pro1 Customer Care toll-free at 888-Pro1iaq (776-1427) during normal business hours (Mon-Fri 9 AM - 6 PM Eastern)

Una versión española de este manual puede ser descargada en www.pro1iaq.com


® U.S. Registered Trademark. Patents pending.
Copyright © 2006 Pro1 IAQ, Inc. All rights reserved.

THERMOSTAT QUICK REFERENCE

Getting to know your thermostat

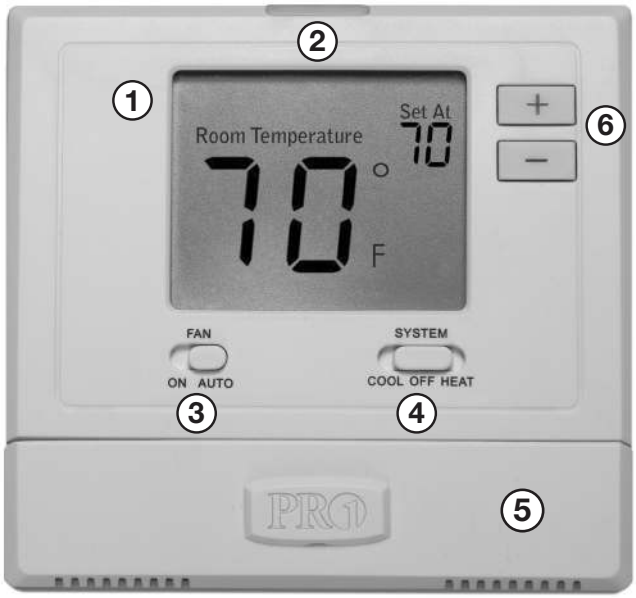

1 LCD

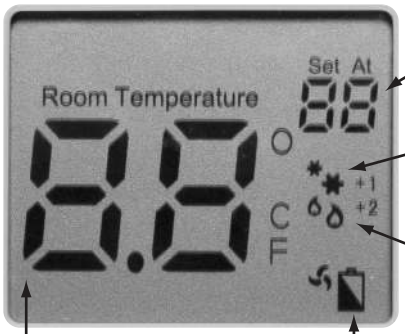

Displays the user selectable setpoint temperature.

System operation indicators: The **COOL, HEAT** or **FAN** icon will display when the **COOL, HEAT** or **FAN** is on. NOTE: The compressor delay feature is active if these icons are flashing. The compressor will not turn on until the 5 minute delay has elapsed.

Low Battery Indicator: Replace batteries when indicator is shown.

Indicates the current room temperature.

2 Glow in the Dark Light Button

3 Fan Switch

4 System Switch


5 Easy Change Battery Door

6 Temperature Setpoint Buttons


Important:

The low battery indicator is displayed when the AA battery power is low. If the user fails to replace the battery within 21 days, the thermostat display will only show the low battery indicator as a final warning before the thermostat becomes inoperable.

Battery door information



Use the finger bevel on the lower portion of the side of the thermostat to open the easy access battery door.

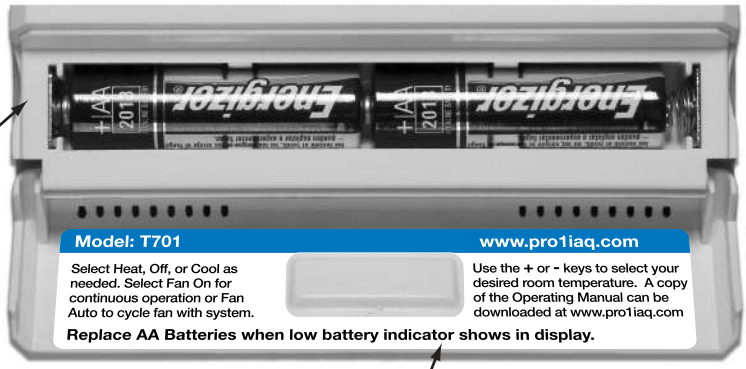


Replace with 2 AA Alkaline batteries.

Simple operating instructions are found on the back of the battery door.

THERMOSTAT OPERATION

Easy to use controls

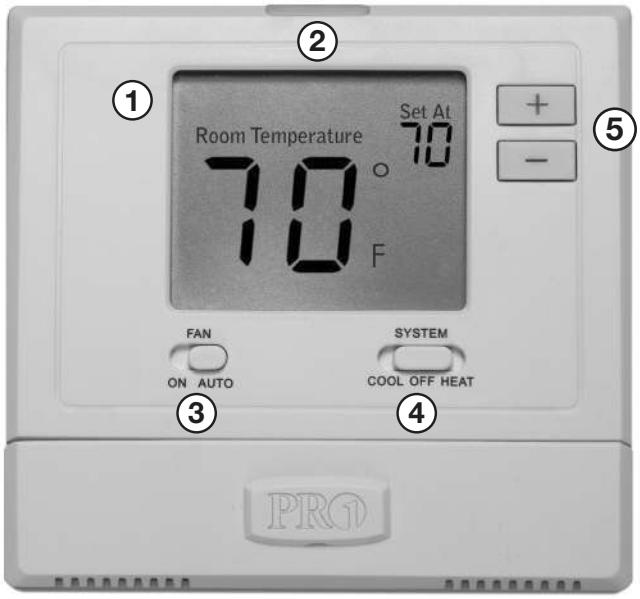

Caution:
When the battery icon appears replace your AA batteries immediately. Failure to do so may result in your heating & cooling system becoming inoperable.

1 LCD Display:
See page 2 for details about this display read out.

2 Glow in the Dark Light Button:
The glow in the dark light button will self illuminate for several hours after exposure to ambient light. This button turns on the display light when pressed.

3 Fan Switch:
Select **ON** or **AUTO**. **ON** will run the fan continuously. **AUTO** will cycle the fan on only when the heating or cooling system is on.

4 System Switch:
Selects the operation mode of your HVAC system. Selecting **HEAT** turns on the heat mode. Selecting **COOL** turns on the air conditioning mode. Selecting **OFF** turns both heating and cooling off.

5 Temperature Setpoint Buttons:
Press the **+** or **-** buttons to select the desired room temperature.

CONTACT US AND WARRANTY INFORMATION

Contact Us Information

Pro1 IAQ Inc.
1111 S. Glenstone
Suite 2-100
Springfield, MO 65804

Toll-free: 1-888-Pro1iaq (776-1427)
Toll Number (Outside the USA): 330-821-3600
Web: http://www.pro1iaq.com
Hours of Operation: Monday - Friday 9 AM - 6 PM Eastern

Warranty Registration:

Your new Pro1 thermostat has a 5 year limited warranty. You must register your warranty within 60 days of installation. You can register your new thermostat in 2 ways.

① Go to www.pro1iaq.com, select warranty registration and fill out a short registration form.

- or -

② Complete the form below and mail it to the address shown.

Pro1 IAQ Warranty Registration:

Name: _____

Address: _____

_____

City: _____

State: _____

Zip: _____

Thermostat Model: _____

Date Installed: _____

Complete form and mail to:

Pro1 IAQ Inc.
1111 S. Glenstone
Suite 2-100
Springfield, MO 65804