

Instruction Manual

24V LED Under Cabinet Light Bar

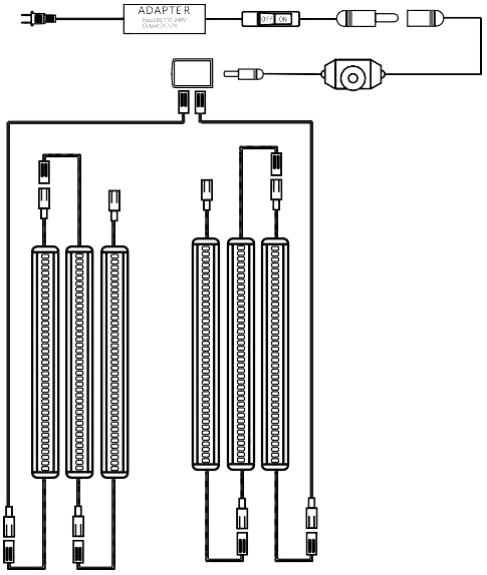

Parallel Connection

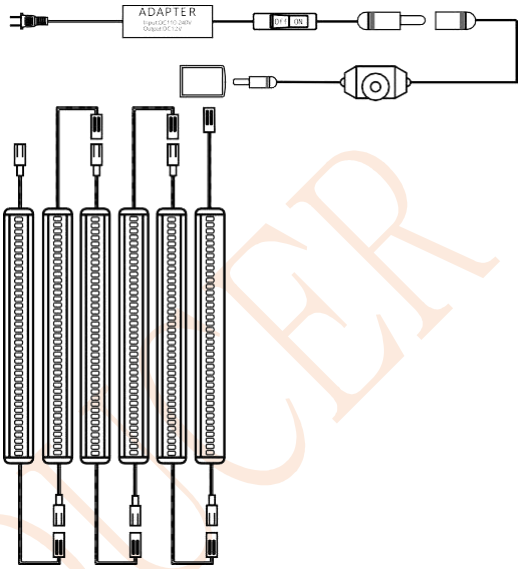



Series Connection

Item	bar6	bar8	bar12
Bar quantity	6	8	12
Six way splitter	1	1	1
60inch extension cords	4	6	8
Bracket	12	16	24
2-sided sticker	18	24	36
Cable Clips	18	24	36
Screws	12	16	24
Adapter	24v 1a	24v 1.5a	24v 1.5a
Rotary Dimmer switch	1	1	1
Toggle switch	1	1	1

LABORED OCER


Specification for the light bar and dimmer



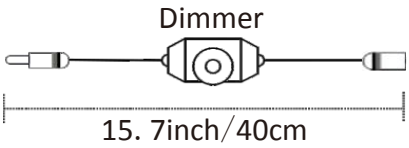


Size: 11.2*1*0.32inch
Wire length on each side: 4inch
Voltage: 24V DC
Power: 3W
Lumen: 300lm/bar
LED Quantity: 36pcs 2835smd Leds
CRI>83
Beam angle: 120deg

Voltage: 24V DC
Dimming range: 0-100%
Max load current: 2A

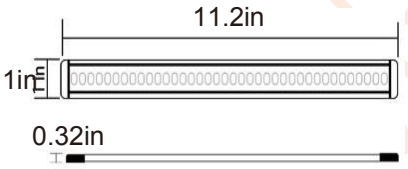

Installation Procedure:

1. Make an overall plan about installation locations, connection way (in series/ parallel), etc;
2. Fix the light bars to the cabinets by adhesive tapes or screws;

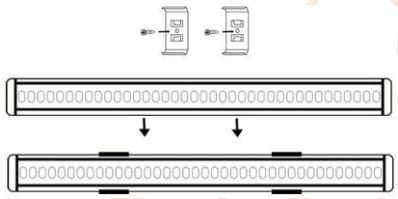

3. Connect all the lights together in series or in parallel as per your own needs;
4. Connect the lights with the 6-way splitter;
5. Connect the splitter with the rotary dimmer switch;
6. Connect the rotary dimmer switch with the toggle and the adapter;
7. Connect the adapter with the power plug;
8. Put the wires in order by clips and power on to start your cabinet lighting experience!

Note: You can achieve the dimming function from 0%~100% brightness by therotary dimmer switch.

Manufacturer: DONG GUAN SHI LIANG RONG DIAN JI YOU XIAN GONG SI
Address: WAN JIAN QU, YAN WU SHE QU, FEN XI LU 215 HAO A DONG ER LOU, DONG GUAN,GUANGDONG, CHINA, 523050
Email: info@ar111.com
Mob: +8613316892276
Website: www.ar111.com

UNDERCABINET